210278
VKHM-W-5/12-A-CS
I/O cable

- Shielded
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts
- For CS Vision Sensors

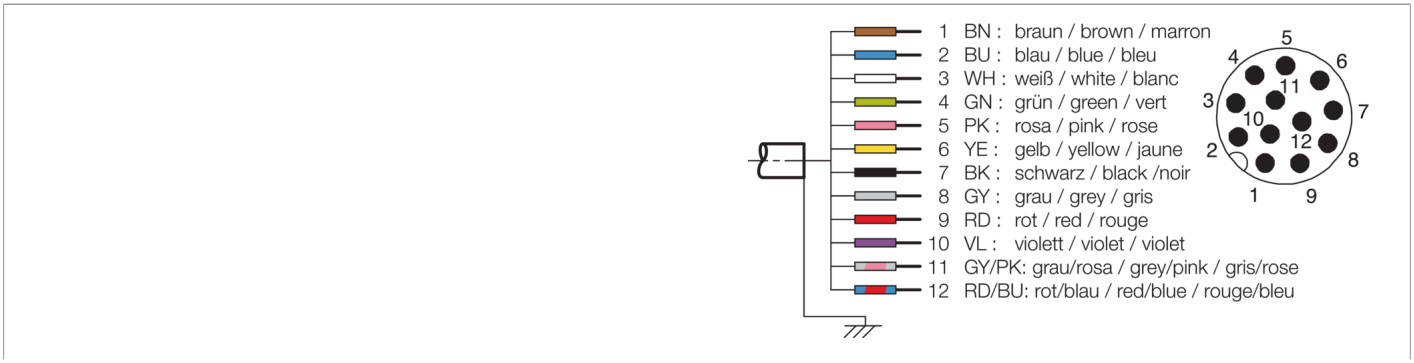

Function

Technical data (typ.)	+20°C, 24 V DC
Service voltage	< 30 V AC/DC
Length	5,000 mm
Diameter	Ø 6.5 mm (Diameter)
Thread	M12
Material	■ Polyurethane, interior PVC (Cable) ■ Polyurethane (Connector)
Protection class	III, operation on protective low voltage
Component	Connection cable
Design	Angled / open cable end
Characteristics	Shielded, Metal nut
To be used for	CS 50 Vision Sensors
Ambient temperature during operation	-5 … +70 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Socket, M12, 12-pin, 12 x 0.25 mm^2
Connection 2	flying leads
Cross-section	0.25 x 0.25 mm

More information / accessories	https://www.di-soric.com/210278

© di-soric . Right to change reserved