




**210278**  
**VKHM-W-5/12-A-CS**  
**I/O cable**

- Shielded
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts
- For CS Vision Sensors

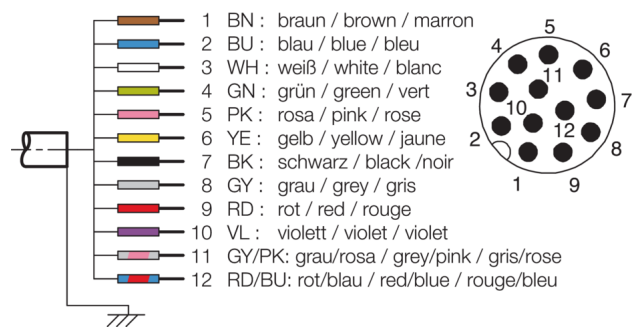

**Function**

--	--	--	--	--	--	--	--	--	--	--	--

**Technical data (typ.)**

**+20°C, 24 V DC**

Service voltage	< 30 V AC/DC
Length	5,000 mm
Diameter	Ø 6.5 mm (Diameter)
Thread	M12
Material	<ul style="list-style-type: none"> <li>■ Polyurethane, interior PVC (Cable)</li> <li>■ Polyurethane (Connector)</li> </ul>
Protection class	III, operation on protective low voltage
Component	Connection cable
Design	Angled / open cable end
Characteristics	Shielded, Metal nut
To be used for	CS 50 Vision Sensors
Ambient temperature during operation	-5 ... +70 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Socket, M12, 12-pin, 12 x 0.25 mm <sup>2</sup>
Connection 2	flying leads
Cross-section	0.25 x 0.25 mm

**More information / accessories**

<https://www.di-soric.com/210278>