





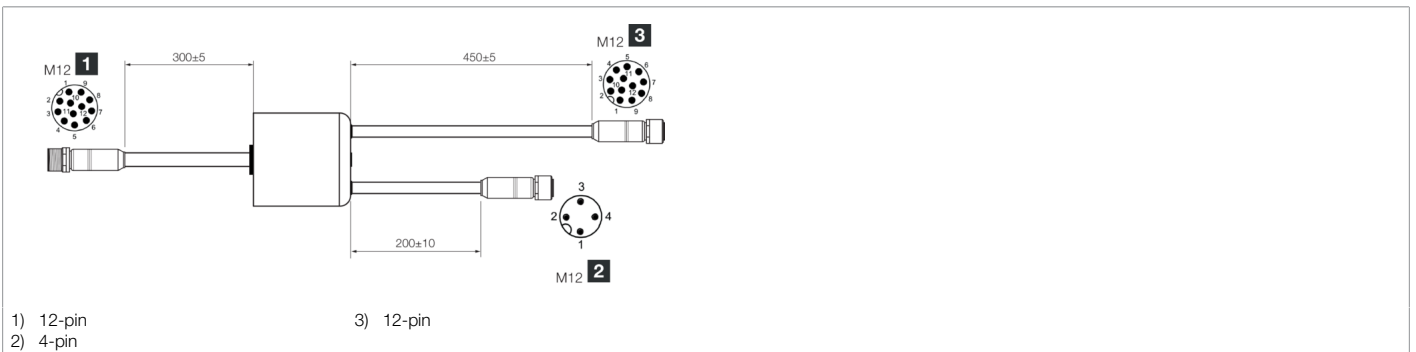

**210606**  
**CS-Y-0.3/12-A**  
**Y-distributor cable**

- Metal connector
- Durable PU coating
- Flexible lead design
- High protection type IP 67

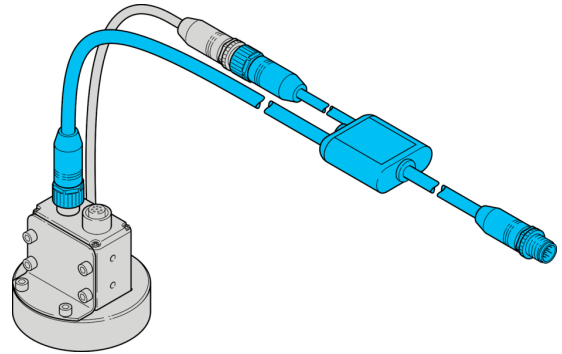

Function											
											 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	< 30 V DC
Operating current	< 1.5 A DC
Housing material	Plastic
Material	Polyurethane (Cable)
Component	Y-distributor cable
Design	straight
To be used for	Connection of a BEK-R33-... to CS 50
Note	IN & OUT kept on PNP (CS50)
External illumination trigger (pnp)	either OUT 3 (CS 50 ...) or PIN 6 (connector M 12)
Ambient temperature during operation	-20 ... +85 °C
Protection type	IP 67
Connection	Connector, M12, 12-pin
Connection 2	Socket, M12, 4-pin
Connection 3	Socket, M12, 12-pin

**More information / accessories** <https://www.di-soric.com/210606>