




**210611**  
**VKHM-Z-25/RJ45**  
**Ethernet cable**

- For Ethernet connection
- Drag chain compatible
- Oil-resistant

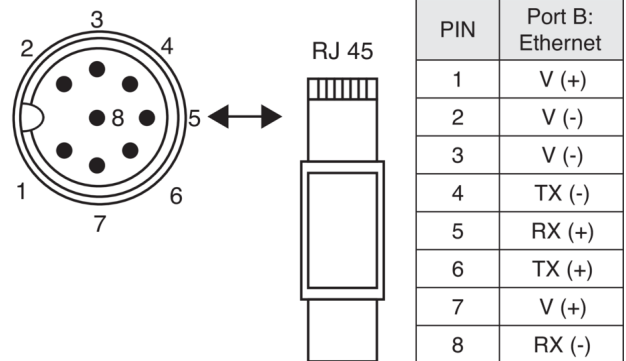

**Function**

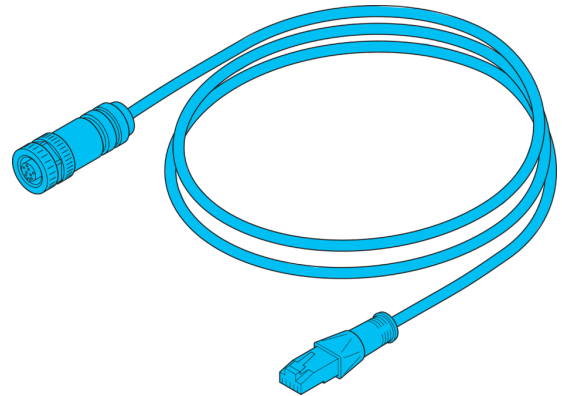

**Technical data (typ.)**

**+20°C, 24 V DC**

Service voltage	30 V DC
Length	25,000 mm
Thread	M12
Material of cable	Polyurethane
Drag chain properties	<ul style="list-style-type: none"> <li>■ &gt; 10 Mio. (Bending cycles)</li> <li>■ 7.5 x Ø (Min. bending radius)</li> <li>■ 3 m/s (Max. moving speed)</li> <li>■ 5 m/s<sup>2</sup> (Max. acceleration)</li> <li>■ ± 30 °/m (Max. torsion)</li> </ul>
Protection class	III, operation on protective low voltage
Component	Interface cable
Design	Straight / straight
Drag chain compatible	Yes
Ambient temperature during operation	-40 ... +80 °C
Protection type	IP 67
Connection	Socket, M12, 8-pin, X-coded
Connection 2	Connector, RJ 45, 8-pin

**More information / accessories**

<https://www.di-soric.com/210611>