



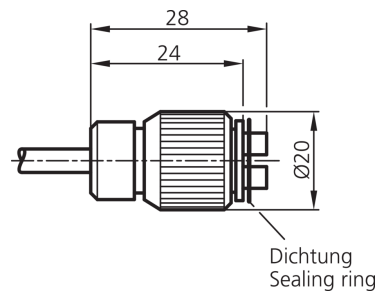

**210903**  
**WRB 120 P-SG-M6x30-2.5**  
**Glass fiber optics**

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

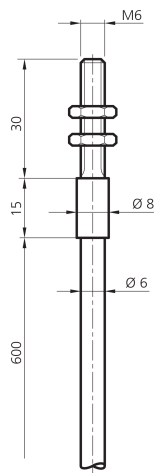

**Technical data (typ.)**

**+20°C, 24 V DC**

Length	600 mm
Dimension fiber bundle	Ø 2.5 mm
Light aperture	axial
Material of fiber	Glass fibers
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ PVC (Coating)</li> </ul>
Component	Glass fiber optics
Operating principle	Diffuse sensor
Operation with	VO-M6/35-M6x30-2.5, VO-M6/50-M6x30-2.5
Design	Thread
Single fiber	Ø 0.05 mm
To be used for	For operating color sensors with fiber optic connection
For FSB 10 M G1-B8	To be used
Opening angle	68°
Temperature resistance	+80 °C (temporarily up to +250 °C)
Protection type	IP 67

**More information / accessories**

<https://www.di-soric.com/210903>