







**212729**  
**MA-T2X**

- Muting made simple through hardware wiring to SLM4
- Pre-wired muting arms for SLM4 for quick commissioning
- Integrable, height-adjustable muting arms in mounting groove of SLM4
- Simple plug connector, connection of muting sensors directly to SLM4 safety light grid

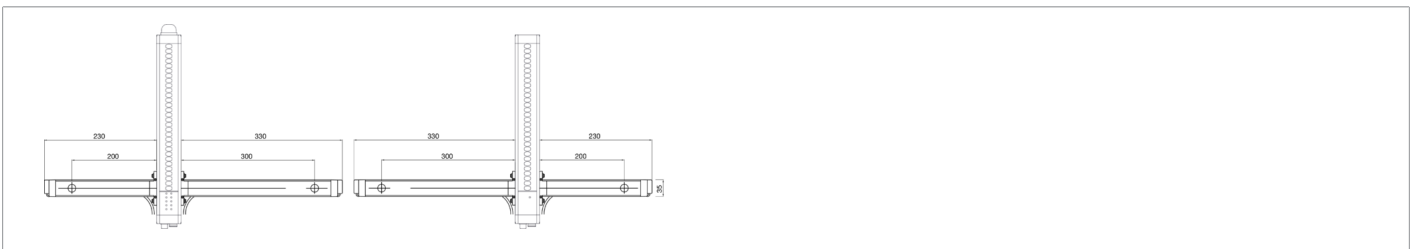

Function														
														

Technical data (typ.)	+20°C, 24 V DC
Service voltage	19.2 ... 28.8 V DC
Characteristic variables	Typ 4
Model	Muting arm
Operating principle	Through-beam sensor
Characteristics	Safety function Muting Activation
Switching output	pnp, 100 mA, NO
Ambient temperature during operation	-30 ... +55 °C

More information / accessories	<a href="https://www.di-soric.com/212729">https://www.di-soric.com/212729</a>
--------------------------------	---