




**212735**  
**MZ-T2X**

- Muting made simple through hardware wiring to SLM4
- Pre-wired muting arms for SLM4 for quick commissioning
- Integrable, height-adjustable muting arms in mounting groove of SLM4
- Simple plug connector, connection of muting sensors directly to SLM4 safety light grid

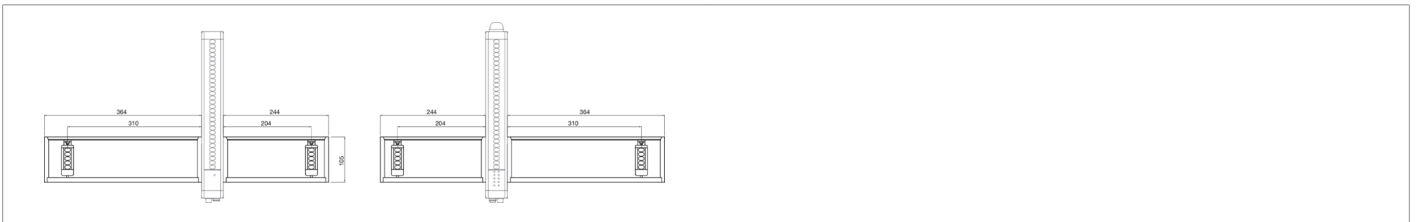

#### Function



#### Technical data (typ.)

**+20°C, 24 V DC**

Service voltage	19.2 ... 28.8 V DC
Characteristic variables	Typ 4
Model	Muting arm
Operating principle	Through-beam sensor 5-beam
Characteristics	For irregular loads, For high speeds
Switching output	pnp, 100 mA, NO
Ambient temperature during operation	-30 ... +55 °C

#### More information / accessories

<https://www.di-soric.com/212735>