




TÜV

- Muting made simple through hardware wiring to SLM4
- Pre-wired muting arms for SLM4 for quick commissioning
- Integrable, height-adjustable muting arms in mounting groove of SI M4
- Simple plug connector, connection of muting sensors directly to SLM4 safety light grid

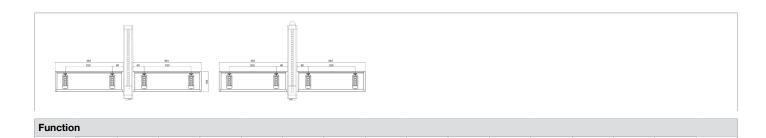

Page 8													
Technical data (typ.)				+20°C, 24 V DC									
Service voltage				19.2 28.8 V DC									
Characteristic variables				Typ 4									
Model				Muting arm									
Operating principle				Through-beam sensor 5-beam									
Characteristics			For i	For irregular loads, For high speeds									
Switching output			pnp,	pnp, 100 mA, NO									
Ambient temperature during operation				-30 +55 °C									

More information / accessories https://www.di-soric.com/212736