




- For the realization of circumferential protective fields with up to 4 sides
- Special models with mirrors that have a shatter protection film are available on request
- Robust column made of aluminum extrusion poles
- With adjustable angular orientation
- Optical power reduction factor 15% for each mirror
- Integrated spherical spirit level to check the correct vertical column axis



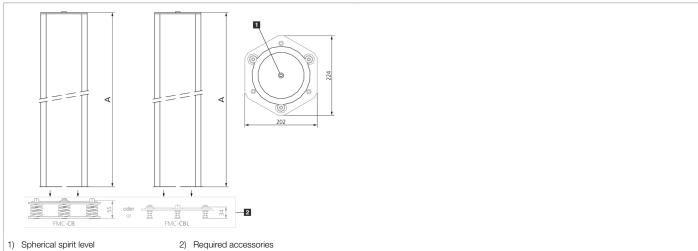

Technical data (typ.)	+20°C, 24 V DC
Housing material	Aluminum rod profile (Epoxy powder coating)
Operating principle	Mounting column
Characteristics	built-in spherical spirit level
To be used for	3 beam safety light grids
Scope of delivery	Fixing material, Assembly instructions
More information / accessories	https://www.di-soric.com/212749