




**212879**  
**US 12 M 150 FB G3-B4**  
**Ultrasonic sensor**

- IO-Link
- Configurable as an ultrasonic sensor or barrier
- 3 different teach modes
- Working range adjustable
- Very narrow detection lobe / no blind area due to focus nozzle
- Switching functions: Closer/opener, window function teachable
- Resistant to dirt
- Small design
- Robust metal housing
- Protection class IP 67

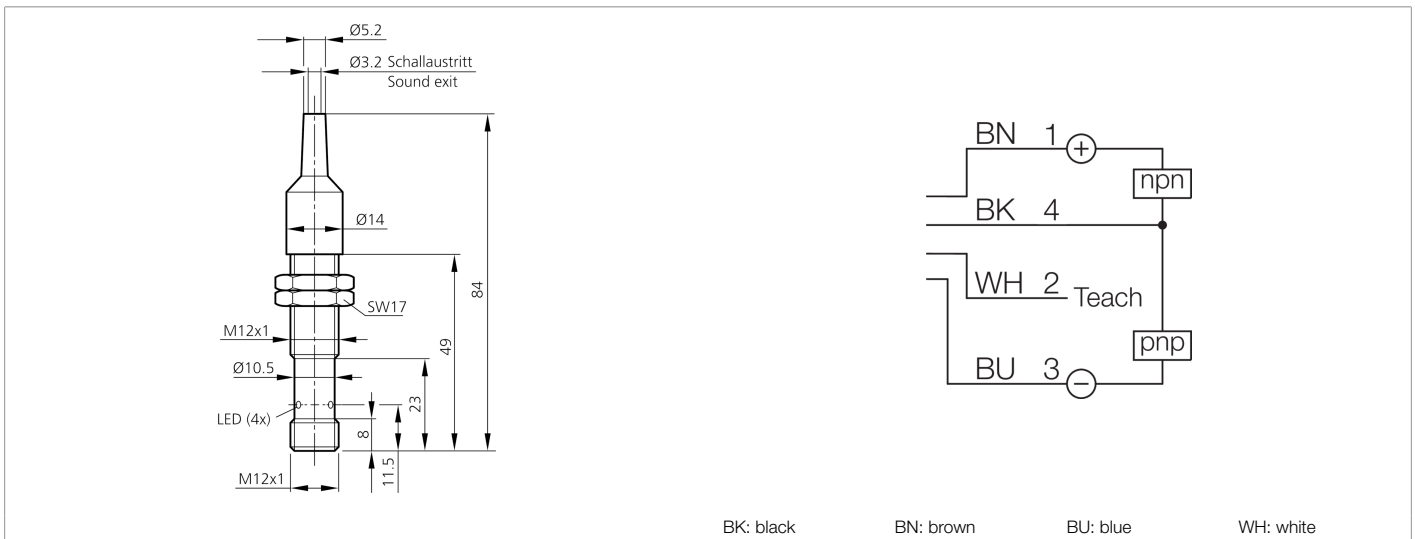

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 ... 30 V DC
No-load current (max.)	40 mA (24 V DC)
Inverse polarity protection	Yes
Short-circuit protection	Yes
Insulation voltage endurance	500 V
Housing dimensions	M12 x 85 mm
Thread	M12 x 1
Housing length	85 mm
Transmission exit	axial
Assembly distance (sensor to sensor)	60 mm
Housing material	Brass (CuZn, nickel-plated)
Material	Epoxy resin, PUR (Transducer surface)
Weight	30 g
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Ultrasonic sensor, Ultrasonic barrier
Evaluation	digital (With IO-Link)
Design	Thread
Characteristics	IO-Link, Focusing nozzle
Parallel operation possible	No



**212879**  
**US 12 M 150 FB G3-B4**  
**Ultrasonic sensor**

Technical data (typ.)	+20°C, 24 V DC
Scope of delivery	Sensor, 2 x M12 nuts
Functions	Teach (Pin 2), Out 1, IO-Link (Pin 4)
Switching output	Push-pull, 150 mA, NO/NC, switchable
Max. switch current	150 mA
Voltage drop (max.)	2 V
Interface	IO-Link (V1.1, COM2 38.4 kBd, Smart Sensor Profile)
Nominal switching distance (Sn)	150 mm
Range	0 ... 150 mm
Adjustment range	0 ... 150 mm (Teach in)
Resolution	1.0 mm
Standardized measuring plate	20 x 20 mm
Switching hysteresis (max.)	2 ... 20 mm (Adjustable by IO-Link)
Reproducibility	< 0.5 mm
Sensitivity adjustment	Remote teach
Display	LED 1x Green - Status, 1x yellow - Switching output
Ultrasonic frequency	400 kHz
Switching frequency	20 Hz
Readiness delay (max.)	300 ms
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	-25 ... +70 °C
Temperature drift	0.2 %/K (uncompensated)
Temperature drift	< 1 %/Sn (compensated)
Protection type	IP 67
Connection	Connector, M12, 4-pin
Connection cable	VKHM ... /4
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/212879">https://www.di-soric.com/212879</a></b>