




212987
OR21-PS-0.3T3
Retroreflective sensor

- Miniature design
- Mounting element made of metal
- High switching frequency
- Long range
- IO-Link
- Diagnostic function reserve

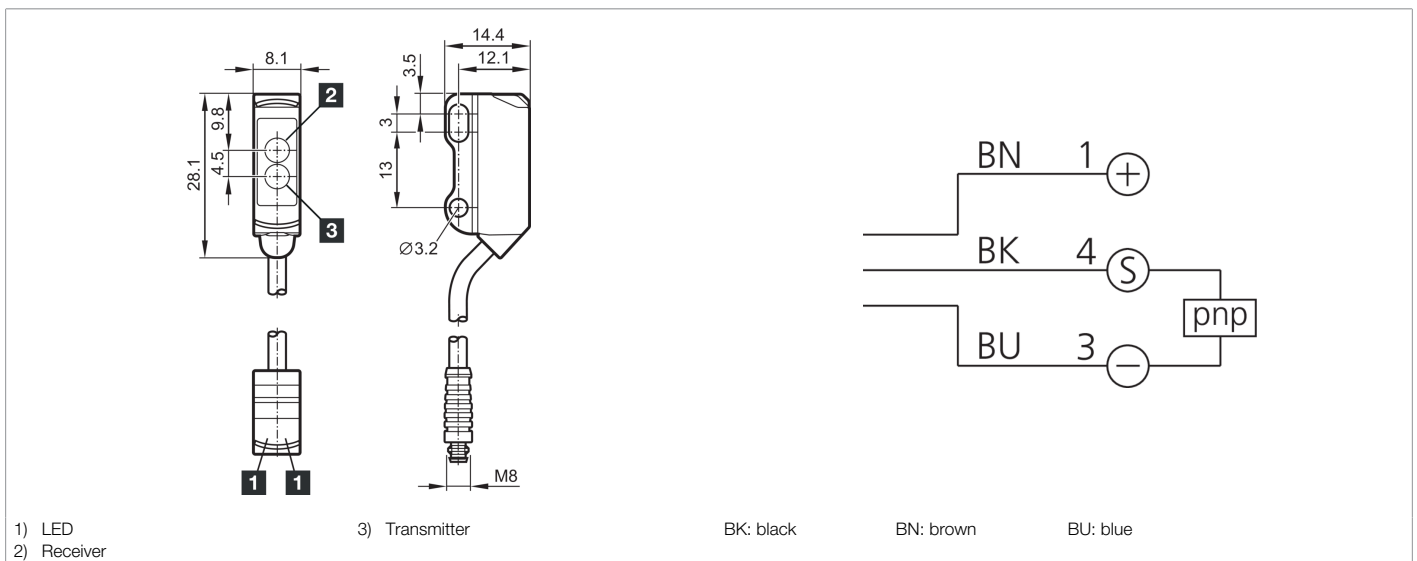

| Function | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | |

| Technical data (typ.) | +20°C, 24 V DC |
|-----------------------------|---|
| Service voltage | 10 ... 30 V DC |
| No-load current (max.) | 20 mA |
| Inverse polarity protection | Yes |
| Housing dimensions | 28.1 x 8.1 x 14.4 mm |
| Housing length | 8.1 mm |
| Housing height | 28.1 mm |
| Housing width | 14.4 mm |
| Housing material | Stainless steel / Plastic |
| Material of cable | PVC |
| Material | Plastic (Window / optics) |
| Weight | 21 g |
| Protection class | III, operation on protective low voltage |
| Approvals | UL |
| Operating principle | Retroreflective sensor |
| Evaluation | digital |
| Design | Cuboid design |
| Switching output | pnp, 100 mA, NO/NC, configurable |
| Voltage drop (max.) | 2.5 V |
| Interface | IO-Link (V1.1, COM2 38.4 kBd, Smart Sensor Profile) |
| Light source | LED |



212987
OR21-PS-0.3T3
Retroreflective sensor

| Technical data (typ.) | +20°C, 24 V DC |
|---------------------------------------|--|
| Color | red |
| Wavelength | 633 nm |
| Modulation | Clocked |
| Light spot size | Ø 120 mm (at distance of 1800 mm) |
| Range | 20 ... 1800 mm (configurable) |
| Standardized measuring plate | 200 x 200 mm (white) |
| Referring reflector | R 19 x 54 mm |
| Sensitivity adjustment | IO-Link |
| Display | LED Green - Operation, yellow - Switching output |
| Switching frequency | 1000 Hz |
| Ambient temperature during operation | -25 ... +60 °C |
| Protection type | IP 65 / IP 67 |
| Connection | Pigtail, 0.3 m, M8, 3-pin |
| Connection cable | TK ... |
| More information / accessories | https://www.di-soric.com/212987 |