




213033
OTD04-20PS-T3
Retroreflective diffuse sensor

- Extremely small design
- Red light
- Scanning range preset
- Stainless steel housing
- Can be installed countersunk
- Large temperature range

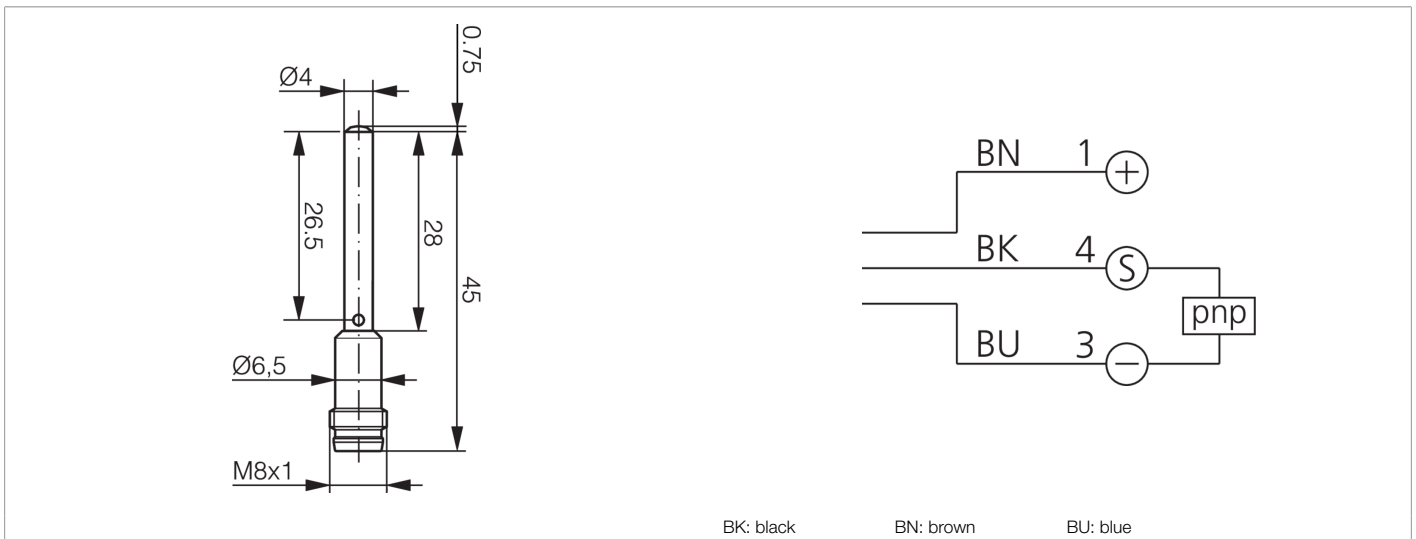

Function													

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	15 mA
Inverse polarity protection	Yes
Diameter	Ø 4.0 mm (Diameter)
Housing length	45.8 mm
Housing material	Stainless steel (V2A)
Material	Plastic (Window / optics)
Weight	4 g
Protection class	III, operation on protective low voltage
Operating principle	Retroreflective diffuse sensor
Evaluation	digital
Design	Cylinder
Switching output	pnp, 100 mA, NO
Voltage drop (max.)	2 V
Light source	LED
Color	Red
Wavelength	630 nm
Light spot size	8 x 10 mm (at distance of 20 mm)
Scanning range	20 mm
Standardized measuring plate	200 x 200 mm (white)



213033

OTD04-20PS-T3

Retroreflective diffuse sensor

Technical data (typ.)	+20°C, 24 V DC
Sensitivity adjustment	no setting elements
Switching frequency	1000 Hz
Ambient temperature during operation	-25 ... +65 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
More information / accessories	https://www.di-soric.com/213033