





HS-K-15-12-A

Kreuzverbinder
Cross connector
Connecteur en croix



di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com

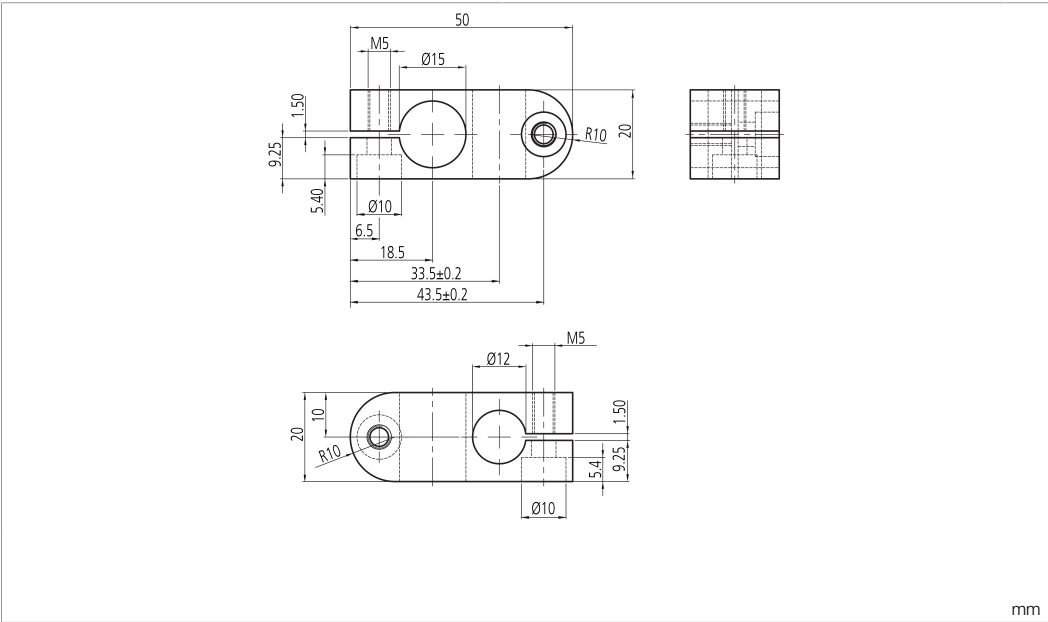


Technische Daten	Technical data	Caractéristiques techniques	+20°C
Produktserie	Product series	Gamme de produits	Z-UBT-KL-MS Montagesystem / Z-UBT-KL-MS Assembly system / Système de montage Z-UBT-KL-MS
Durchm. Montagezapfen/Bohrung	Diameter Mounting pin / boring	Diam. tourillon de montage/alésage	Ø 15 / Ø 12 mm
Material	Material	Matériau	Aluminium / Aluminum / Aluminium


Stand 03.11.23, Änderungen vorbehalten
As of 11/03/23, subject to change
État 03.11.23, sous réserve de modifications

HS-K-15-12-A

十字连接件



di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com

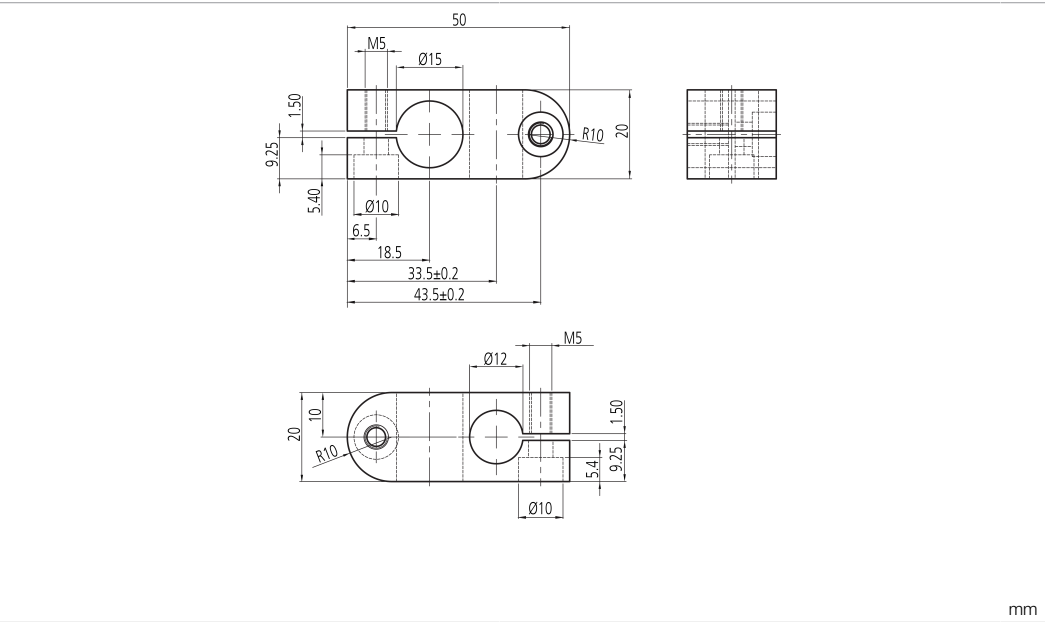

技术数据

产品系列

直径装配栓/钻孔

材料

+20°C

Z-UBT-KL-MS 安装系统

$\varnothing 15 / \varnothing 12$ mm


铝

版本 23.11.03, 保留变更权


Grundhalter Ø 12 mm

Basic system holder Ø 12 mm


12 mm du support Ø de système de base

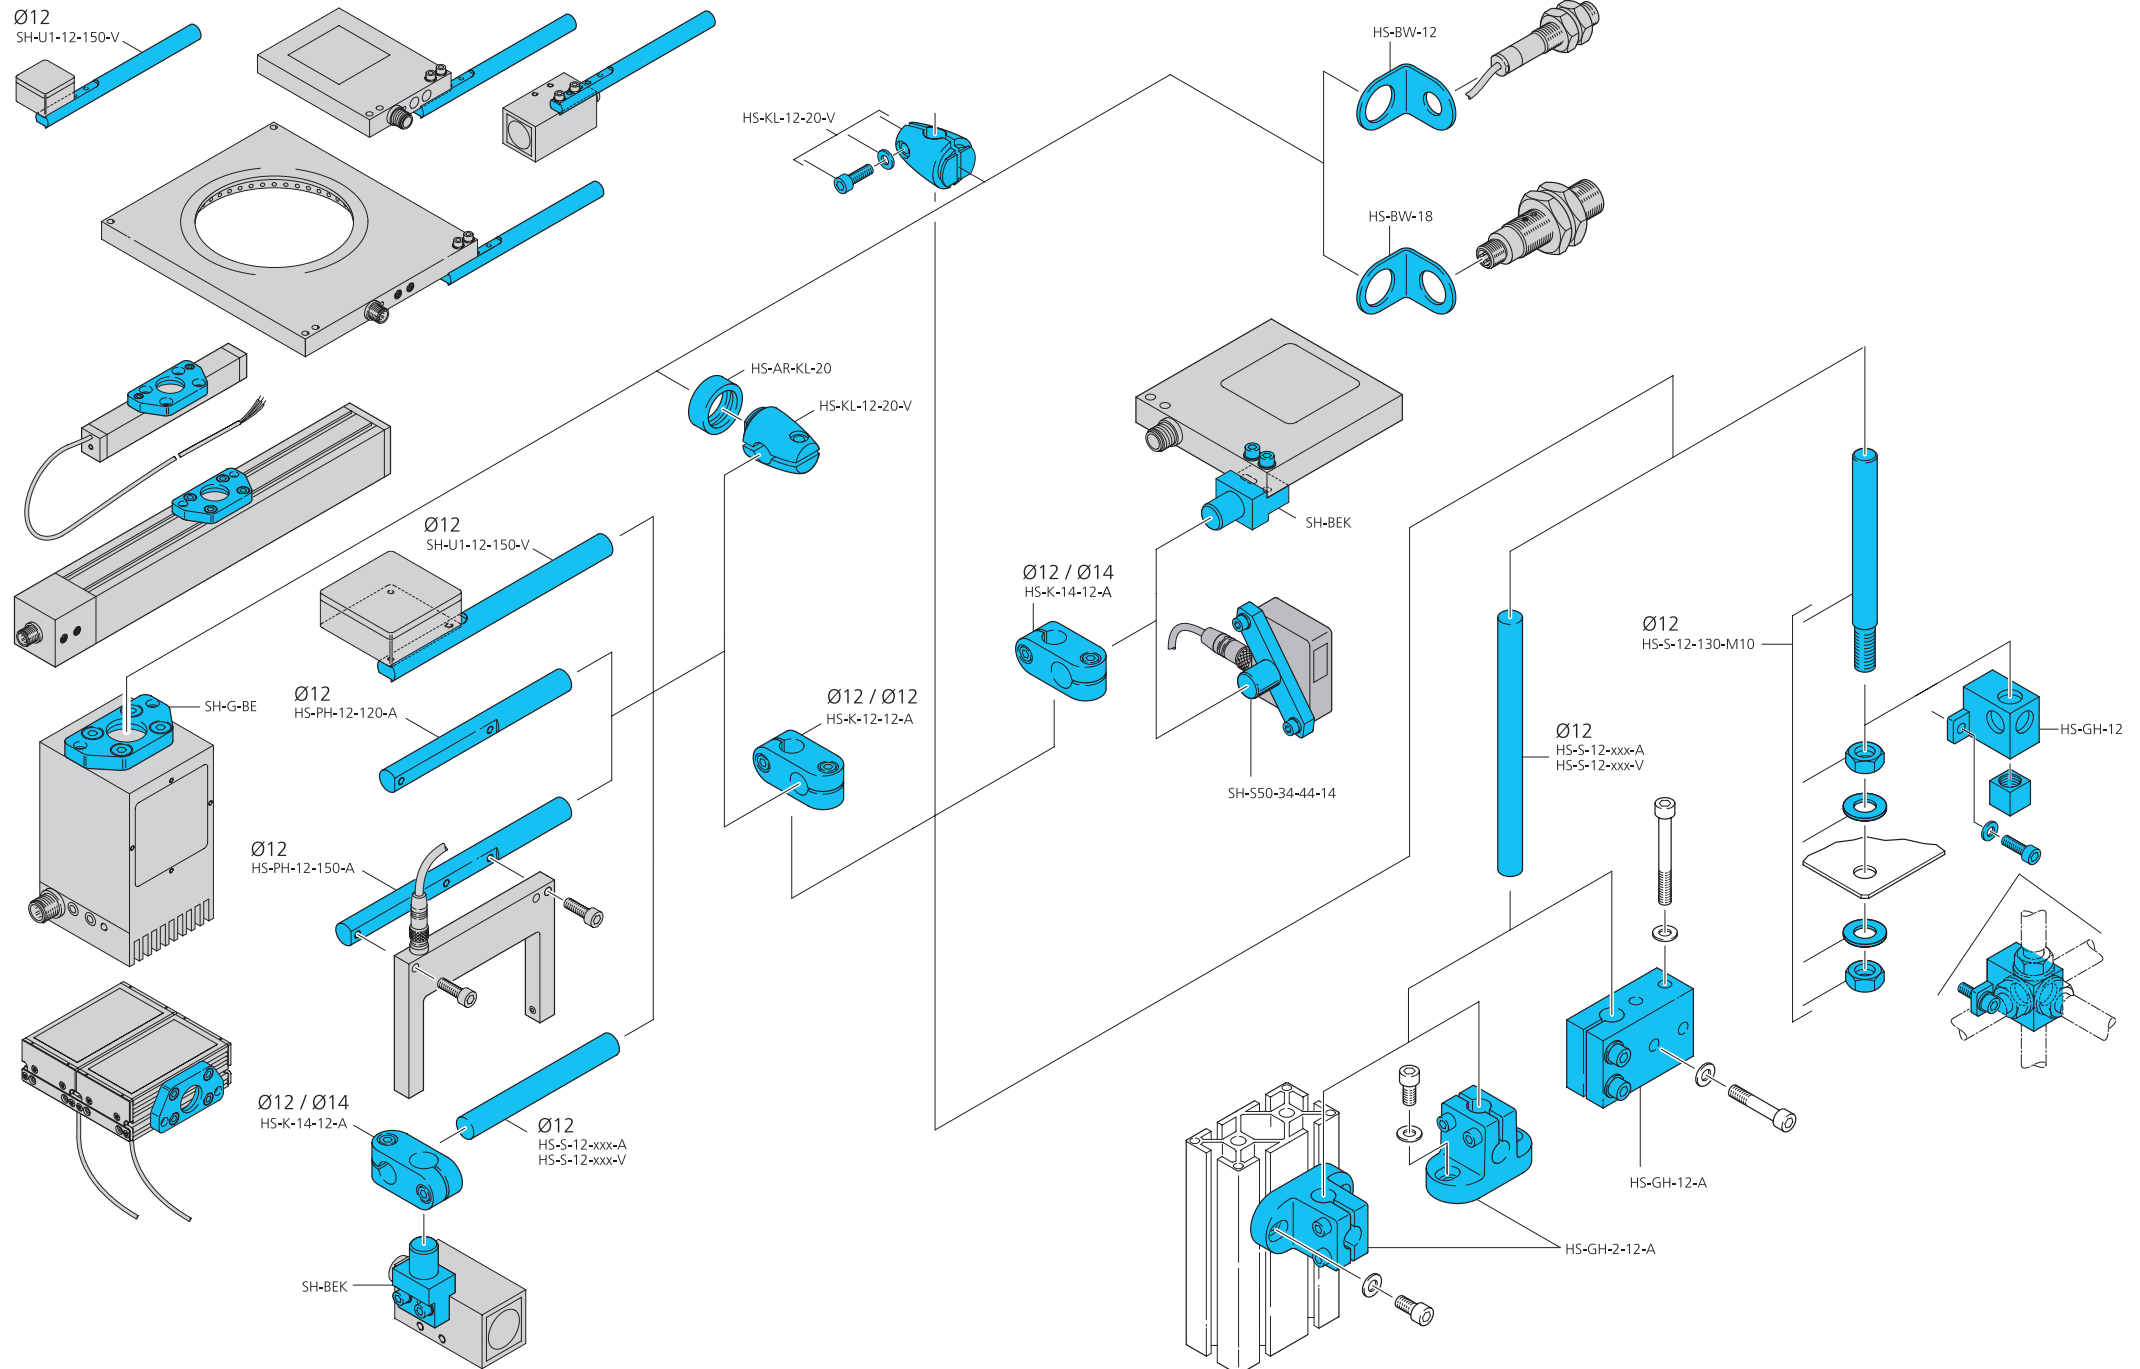

Grundhalter Ø 15 mm

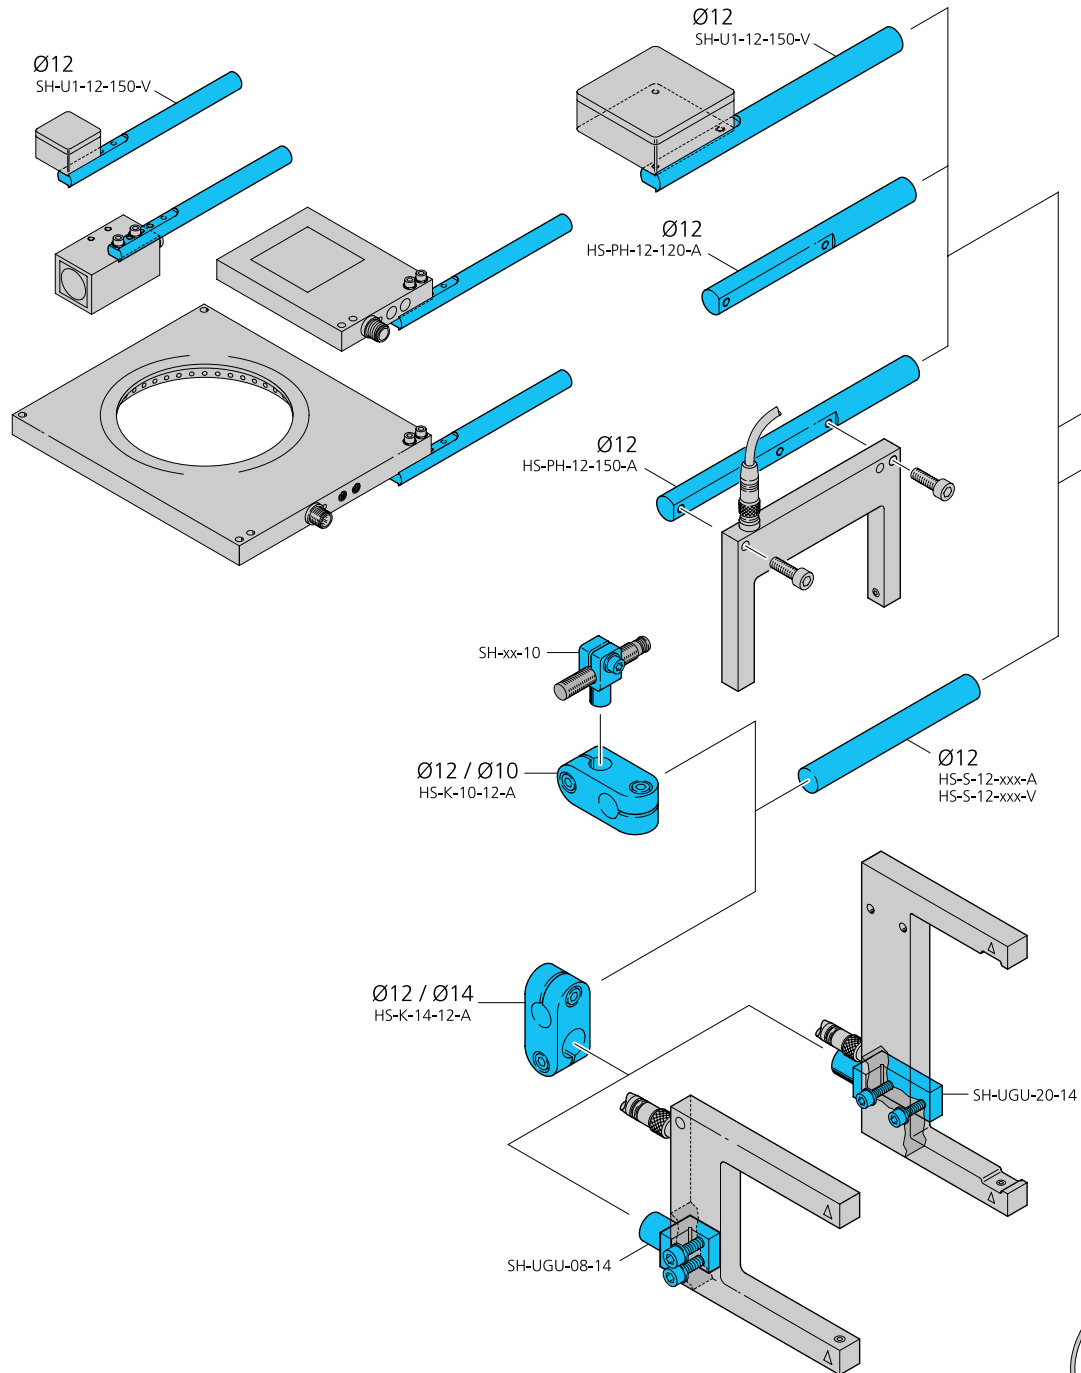

Basic system holder Ø 15 mm

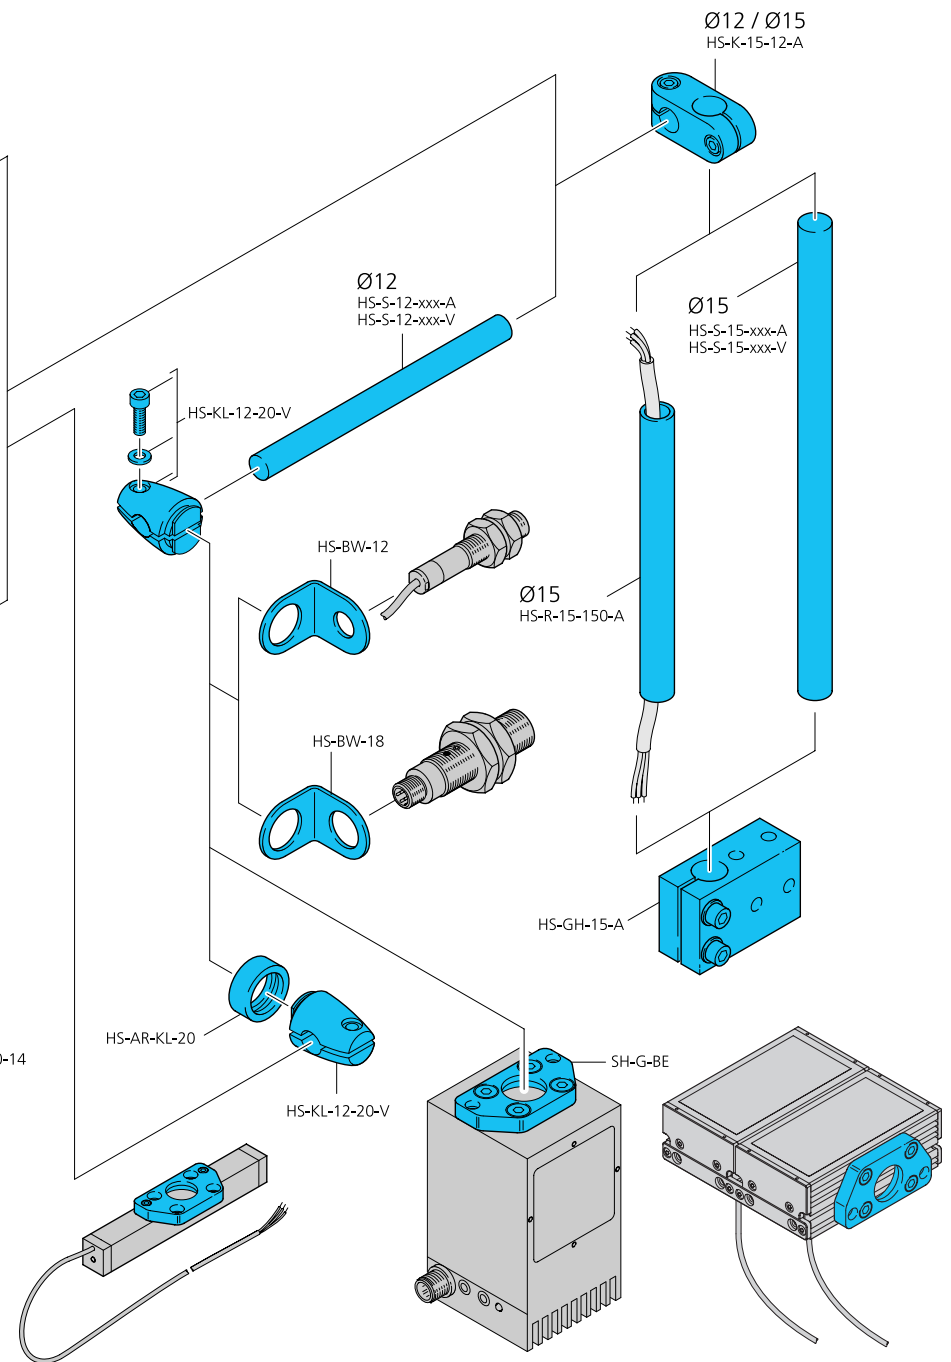

15mm du support Ø de système de base