



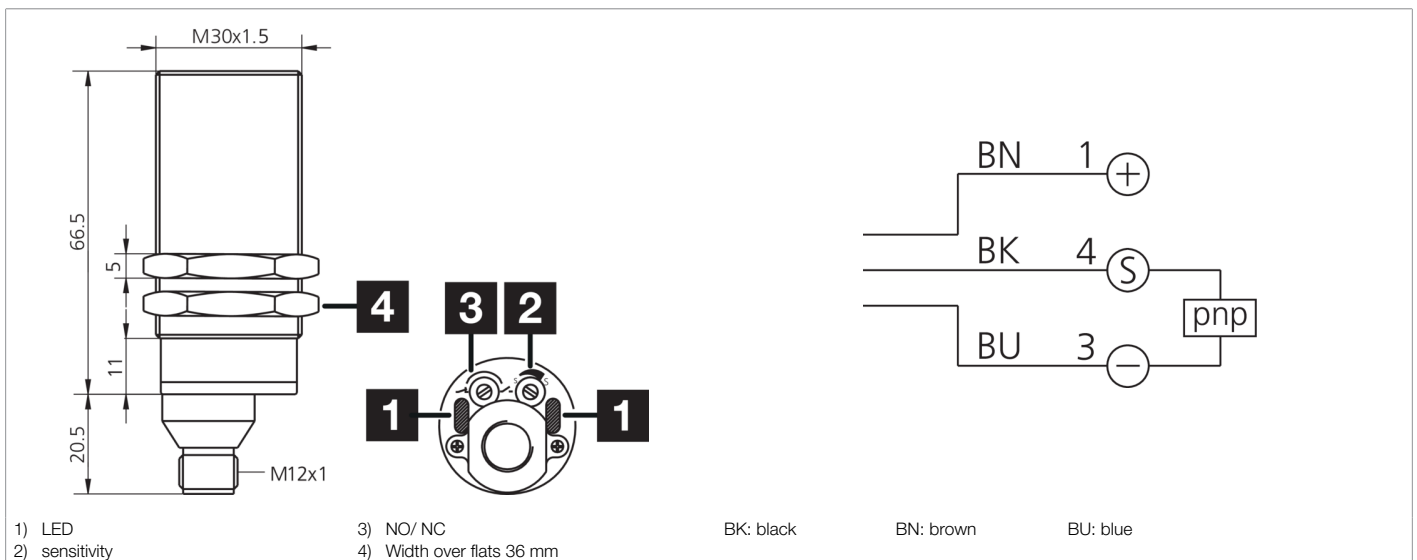

200854
KDC 30 M 20 PSOK-BSL
Capacitive proximity switch

- Detection of electrically conductive and electrically non-conductive materials
- Detection of liquids, powdery and solid materials
- Detection possible even through containers and packaging
- Sensitivity is adjustable
- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

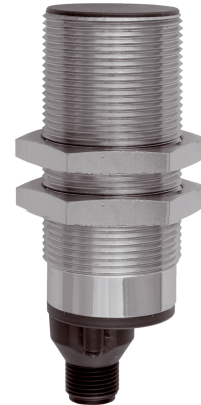

Function									

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M30 x 1.5
Housing length	87 mm
Housing material	Stainless steel
Protection class	III, operation on protective low voltage
Operating principle	Capacitive
Evaluation	digital
Design	Thread
Scope of delivery	2 x M30 nuts
Switching output	pnp, 300 mA, NO/NC, switchable
Voltage drop (max.)	1.8 V
Switching distance (SN)	20 mm
Standardized measuring plate	60 x 60 x 1 mm
Switching hysteresis (max.)	15 %
Sensitivity adjustment	Potentiometer
Switching frequency	100 Hz

**200854****KDC 30 M 20 PSOK-BSL****Capacitive proximity switch****Technical data (typ.)****+20°C, 24 V DC**

Ambient temperature during operation

-30 ... +70 °C

Protection type

IP 67 (Front side) / IP 64 (Back side)

Connection

Connector, M12, 3-pin

Connection cable

VK ...

More information / accessories<https://www.di-soric.com/200854>