# 201120
# MS-Z-12/4
# Plug connector

- Metal/plastic housing
- Turnable metal thread
- Quick mounting without tools
- 4-pin
- High protection type

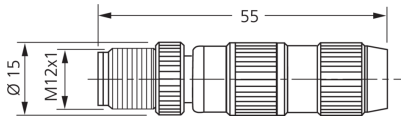








Blick auf Anschlussseite
View on connection position

BK: black BN: brown BU: blue WH: white

| Function | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | | CE | UKCA | |

| Technical data (typ.) | +20°C, 24 V DC |
|---|---|
| Service voltage | 32 V DC |
| Housing material | Metal / Plastic |
| For Ø cable | 4.0 … 5.1 mm |
| For Ø wire | 1.0 … 1.6 mm (Wire must not be stripped!) |
| For strand cross-section | 0.25 … 0.50 mm² |
| Design | straight |
| Ambient temperature during operation | -25 … +85 °C |
| Protection type | IP 67 |
| Sensor-side connection | Connector, M12 x 1, 4-pin |
| Control-side connection | Field-wireable, Insulation displacement connectors |

| More information / accessories | https://www.di-soric.com/201120 |
|---|---|


© di-soric . Right to change reserved