




201272
OGU 05/100 P3K-TSSL
Optical label sensor

- Metal casing
- Electronics integrated
- Sensitivity is adjustable
- High switching frequency
- Light/dark switching
- Bright ring LED
- High protection type

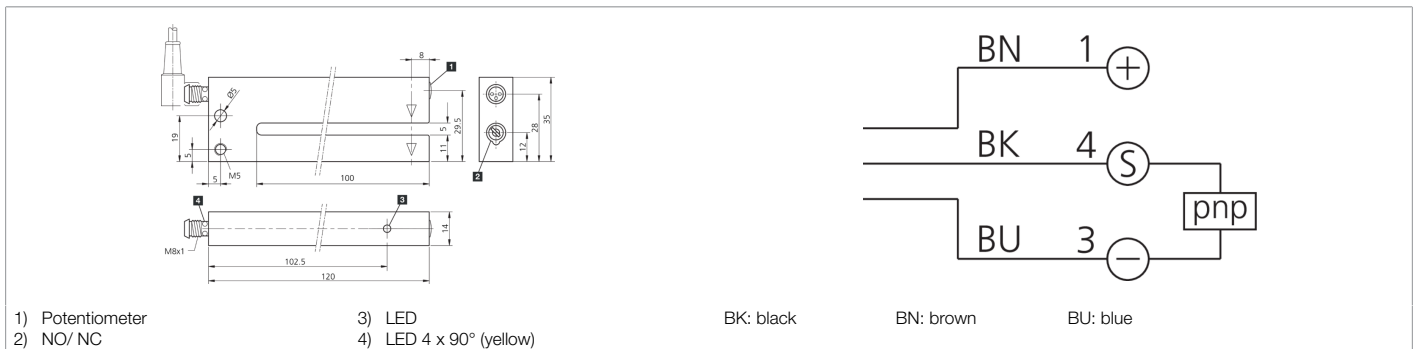

| Function | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | |

| Technical data (typ.) | +20°C, 24 V DC |
|------------------------------|--|
| Service voltage | 10 ... 35 V DC (Supply Class 2) |
| No-load current (max.) | 45 mA |
| Insulation voltage endurance | 500 V |
| Leg length internal | 100 mm |
| Housing dimensions | 35 x 120 x 14 mm |
| Housing length | 120 mm |
| Housing height | 35 mm |
| Housing width | 14 mm |
| Housing material | Die-cast zinc (Black, painted) |
| Protection class | III, operation on protective low voltage |
| Approvals | UL |
| Operating principle | Optical |
| Evaluation | digital |
| Design | Fork |
| Product series | OGUTI Optical |
| Switching output | pnp, 200 mA, NO/NC, switchable |
| Voltage drop (max.) | 2.8 V |
| Light source | LED |
| Color | Infrared |
| Wavelength | 880 nm |
| Modulation | non-clocked |
| Ambient light immunity | 10 kLx |
| Fork opening | 5 mm |
| Switching hysteresis (max.) | 0.1 mm |
| Sensitivity adjustment | Potentiometer |
| Switching frequency | 10000 Hz |



201272
OGU 05/100 P3K-TSSL
Optical label sensor

| | |
|---------------------------------------|--|
| Technical data (typ.) | +20°C, 24 V DC |
| Ambient temperature during operation | -10 ... +60 °C |
| Protection type | IP 67 |
| Connection | Connector, M8, 3-pin |
| Connection cable | TK ... |
| More information / accessories | https://www.di-soric.com/201272 |