




**202154**  
**WRBT 2000 KB-M3-0.5**  
**Plastic fiber optics**

- Fine inner fiber for maximal resolution

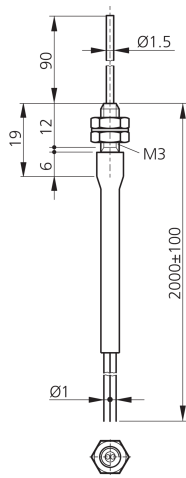

**Technical data (typ.)**

**+20°C**

Length	2,000 mm
Thread	M3
Light aperture	axial, Flexible sensor probe
Bending radius	> 15 mm
Bending radius of probe	> 25 mm
Material of fiber	PMMA
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ VA (Thread sleeve)</li> <li>■ PE (Coating)</li> </ul>
Operating principle	Diffuse sensor
Design	Thread
Single fiber-optics	Ø 1 mm
Single fiber	Ø 0.50 mm (151 x 0.075 mm)
To be used for	Device series OLV-K Amplifier
Opening angle	56°
Range	70 mm
Temperature resistance	-55 ... +70 °C

**More information / accessories**

<https://www.di-soric.com/202154>