




202157
WRBT 2000 K-M3-0.5
Plastic fiber optics

- Fine inner fiber for maximal resolution

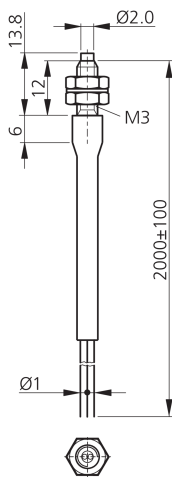

Technical data (typ.)	+20°C
Length	2,000 mm
Thread	M3
Light aperture	axial
Bending radius	> 15 mm
Material of fiber	PMMA
Material	<ul style="list-style-type: none"> ■ VA (Thread sleeve) ■ PE (Coating)
Operating principle	Diffuse sensor
Design	Thread
Single fiber-optics	Ø 1 mm
Single fiber	Ø 0.50 mm (151 x 0.075 mm)
To be used for	Device series OLV-K Amplifier
Opening angle	56°
Range	70 mm
Temperature resistance	-55 ... +70 °C
More information / accessories	https://www.di-soric.com/202157