




202856
VKHM-Z/VSM-Z/P4
Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

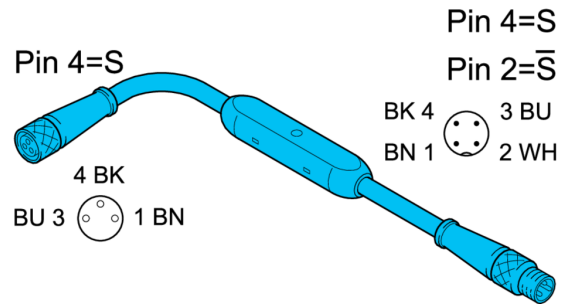

1) Potentiometer (only ...TSM-Z/T) 3) LED SWITCHING OUTPUT
 2) LED STATUS

4 BK (S)
 BU 3 1 BN
 n.c.
 Kupplung
 Coupling
 M12

BK 4 (S) 3 BU
 BN 1 2 WH (\bar{S})
 Stecker
 Connector
 M12

BK: black BN: brown BU: blue WH: white

Function										

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA
Thread	M12 x 1
Housing material	Plastic
Protection class	III, operation on protective low voltage
Evaluation	pnp antivalence device
Application	Digital signal
Function selection	pnp
Switching output	pnp (2x)
Switching frequency	3500 Hz
Ambient temperature during operation	-20 ... +70 °C
Protection type	IP 67
Connection	Pigtail, Coupling, M12, 4-pin
Connection 2	Pigtail, Connector, M12, 3-pin

More information / accessories <https://www.di-soric.com/202856>