



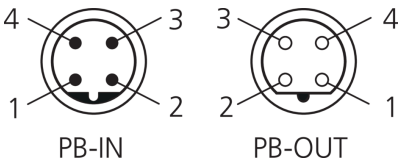

203253
VSHM-Z-0.6/VKM-Z/4
Connection cable

- Connection cable: Connector / coupling
- Sturdy metal union nut
- Flexible lead design
- High protection type

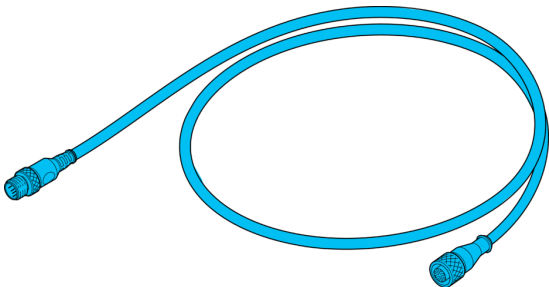

Function														  		
Technical data (typ.)								+20°C, 24 V DC								
Service voltage								< 250 V AC/DC								
Length								600 mm								
Material of cable								Polyurethane								
Drag chain properties								> 2 Mio. (Bending cycles)								
Protection class								III, operation on protective low voltage								
Component								Connection cable								
Design								Straight / straight								
To be used for								Device plug M12, 4-pin								
Drag chain compatible								Yes								
Ambient temperature during operation								-5 ... +80 °C (Movable, Fixed)								
Protection type								IP 67 (at tightening torque 0.6 Nm)								
Connection								Connector, M12, 4-pin, A-coded								
Connection 2								Socket, M12, 4-pin, A-coded								
Cross-section								0.34 x 0.34 mm (4 x)								
More information / accessories								https://www.di-soric.com/203253								