




203348
D7C 08 V 06 PSLK
Inductive proximity sensor

- Closed, all-steel sleeve
- 3-times the standard operating distance
- Same operating distance to steel and aluminum
- Housing and sensing face made of stainless steel
- Insensitive to aggressive cleaning agents, environmental influences and hot filings
- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

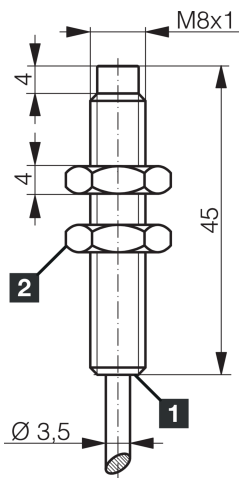

1) LED 2) Width over flats 13 mm BK: black BN: brown BU: blue

Function

--	--	--	--	--	--	--	--	--	--	--

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	non-flush
Thread	M8 x 1
Housing length	45 mm
Housing material	Stainless steel
Material of cable	Polyurethane
Tightening torque	10 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	extremely high operating distance, < 100 bar, Full-metal casing closed, pressure-resistant
Product series	INW-300 Full metal extended
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Switching distance (SN)	6 mm
Standardized measuring plate	18 x 18 x 1 mm
Switching hysteresis (max.)	15 %

**203348****D7C 08 V 06 PSLK****Inductive proximity sensor****Technical data (typ.)****+20°C, 24 V DC**

Switching frequency

700 Hz

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 68

Connection

Cable, 2.0 m (flying leads)

More information / accessories<https://www.di-soric.com/203348>