







**203503**  
**TKPM-W-5/LP**  
**Connection cable**

- Cable material made of PVC for applications in wet rooms or under water
- LEDs for service voltage and switching status
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

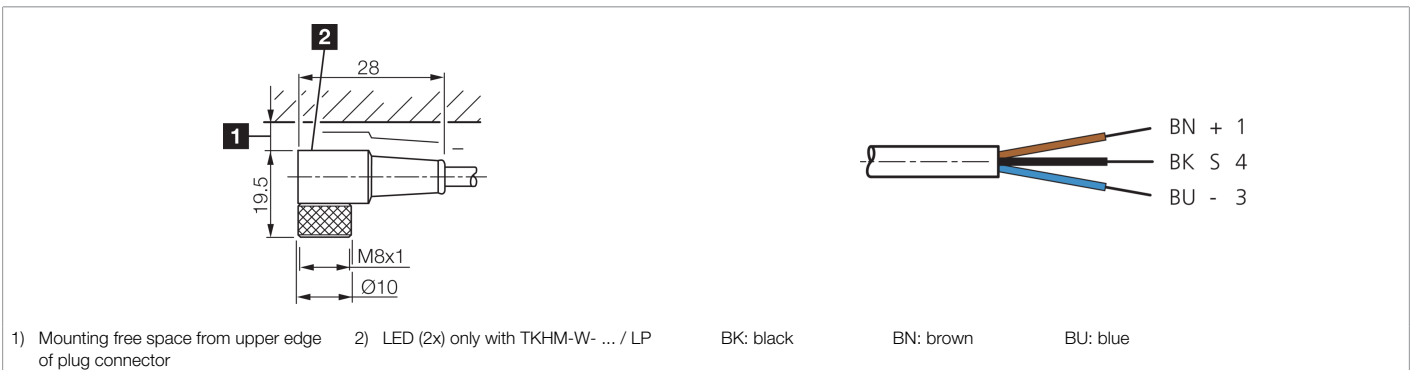

| Function |  |  |  |  |  |  |  |  |  |  |  |  |                                                                                                                                                                                                                                                                   |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |  |  |  |  |  |  |  |  |  |  |  |  |    |

| Technical data (typ.)                |                                          |
|--------------------------------------|------------------------------------------|
| Service voltage                      | < 30 V DC                                |
| Length                               | 5,000 mm                                 |
| Diameter                             | Ø 4.5 mm (Diameter)                      |
| Thread                               | M8 x 1                                   |
| Material of cable                    | PVC                                      |
| Protection class                     | III, operation on protective low voltage |
| Design                               | Angled / open cable end                  |
| Characteristics                      | Metal nut                                |
| LED Anzeige                          | Yes                                      |
| Ambient temperature during operation | -5 ... +80 °C (Movable, Fixed)           |
| Protection type                      | IP 67                                    |
| Connection                           | Socket, M8, 3-pin, A-coded               |
| Cross-section                        | 0.25 mm <sup>2</sup> (3 x)               |

**More information / accessories**    <https://www.di-soric.com/203503>