







203530
TKPM-Z-5/4
Connection cable

- Cable material made of PVC for applications in wet rooms or under water
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

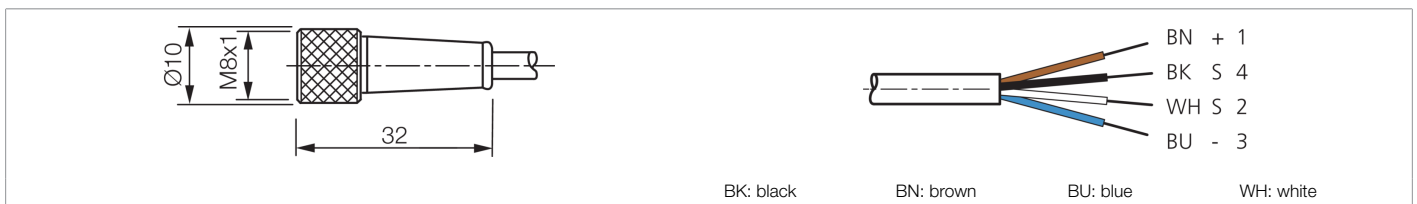

| Function | | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | |    |

| Technical data (typ.) | |
|--------------------------------------|--|
| Service voltage | < 60 V AC/DC |
| Length | 5,000 mm |
| Diameter | Ø 4.8 mm (Diameter) |
| Thread | M8 x 1 |
| Material of cable | PVC |
| Protection class | III, operation on protective low voltage |
| Design | Straight / open cable end |
| Characteristics | Metal nut |
| LED Anzeige | No |
| Ambient temperature during operation | -5 ... +80 °C (Movable, Fixed) |
| Protection type | IP 67 |
| Connection | Socket, M8, 4-pin, A-coded |
| Cross-section | 0.25 mm ² (4 x) |

| More information / accessories | https://www.di-soric.com/203530 |
|--------------------------------|---|
|--------------------------------|---|