



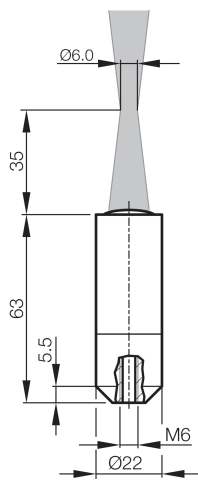

**203649**  
**VO-M6/35-M6x30-2.5**  
**Focus optics**

- For operating color sensors with fiber optic connection
- Robust design



**Technical data (typ.)**

**+20°C, 24 V DC**

Component	Focus optics
Operation with	WRB 120 S-SG-M6x30-2.5, WRB 120 P-SG-M6x30-2.5
For FSB 10 M G1-B8	To be used with WRB 120 S-SG-M6x30-2.5, To be used with WRB 120 P-SG-M6x30-2.5
For FSB 50 M 60 G3-B8	To be used with WRB 120 S-SG-M6x30-2.5, To be used with WRB 120 P-SG-M6x30-2.5
For FS 50 M G3-B8	To be used with WRB 120 S-SG-M6x30-2.5, To be used with WRB 120 P-SG-M6x30-2.5
For FS 12-100-1 M G3-B8	To be used with WRB 120 S-SG-M6x30-2.5, To be used with WRB 120 P-SG-M6x30-2.5
For FS 12-100-1 M G3-B8-E	To be used with WRB 120 S-SG-M6x30-2.5, To be used with WRB 120 P-SG-M6x30-2.5
For FS 12-100-2 M G3-B8	To be used with WRB 120 S-SG-M6x30-2.5, To be used with WRB 120 P-SG-M6x30-2.5
Light spot size	Ø 6 mm
Working distance	35.0 mm
Working range	30 ... 60 mm

**More information / accessories**

<https://www.di-soric.com/203649>