



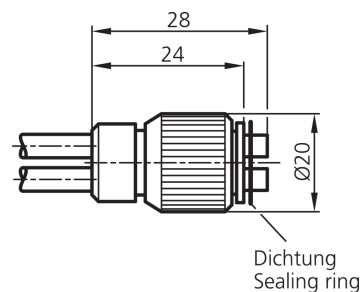

203657
WRB 220 S-4.5-2.5
Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

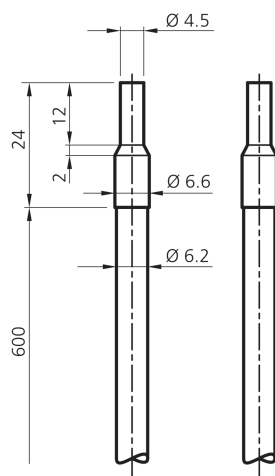

Technical data (typ.)

+20°C, 24 V DC

Length	600 mm
Light aperture	axial
Bending radius	> 3 x tube-Ø
Material of fiber	Glass fibers
Material	Silicone-metal sleeve (Coating)
Component	Glass fiber optics
Operating principle	Through-beam sensor
Operation with	VO-F/90-4.5-2.5, VO-F/200-4.5-2.5
Design	Cylinder
Single fiber	Ø 0.05 mm
To be used for	For operating color sensors with fiber optic connection
For FSB 50 M 60 G3-B8	To be used
For FS 50 M G3-B8	To be used
For FS 12-100-1 M G3-B8	To be used
For FS 12-100-1 M G3-B8-E	To be used
For FS 12-100-2 M G3-B8	To be used
Opening angle	67°
Temperature resistance	-40 ... +180 °C (temporarily up to +250 °C)
Protection type	IP 67

More information / accessories

<https://www.di-soric.com/203657>