





**204404**  
**MS 70 PS-TSSL**  
**Magnetic field sensor**

- Detection of current flow in welding cables
- Compact design
- Low weight
- Slot for quick mounting

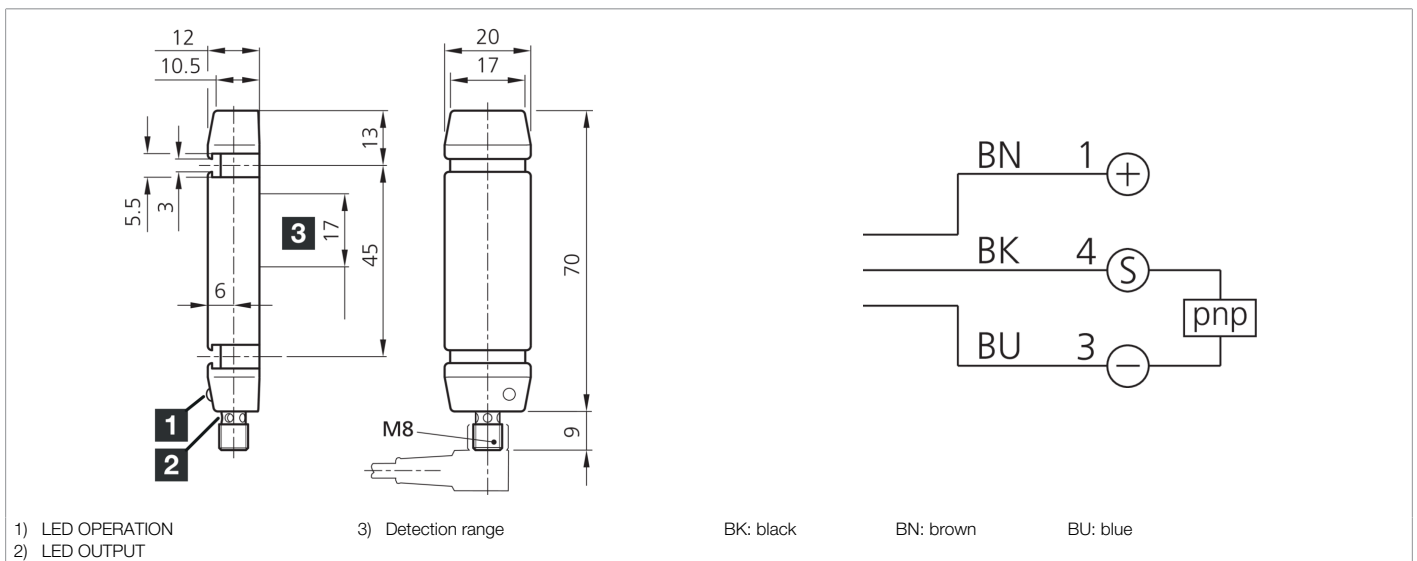

Function											
										CE	

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	10 mA
Activation field	5 mT
Field type	AC/DC, frequency afflicted
Insulation voltage endurance	500 V
Housing material	Plastic (PC)
Protection class	III, operation on protective low voltage
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Pulse stretching	150 ms
Display	LED yellow - Output signal
Response time	0.06 ms
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...

**More information / accessories**      <https://www.di-soric.com/204404>