




205629
OGU 30/31-0 P2K-IBS
Fork light barrier

- High function reserve
- Universal mounting
- Robust metal housing

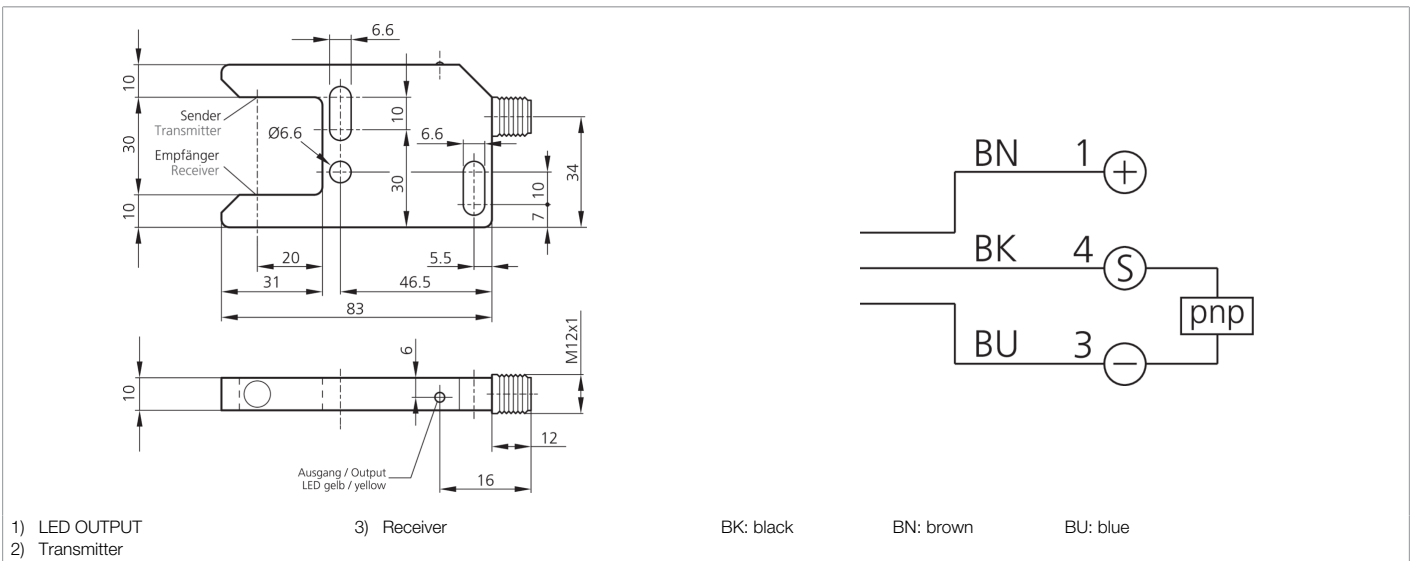

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA
Insulation voltage endurance	500 V
Leg length internal	31 mm
Housing material	Aluminum
Protection class	III, operation on protective low voltage
Operating principle	Optical
Evaluation	digital
Design	Fork
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2.8 V
Light source	LED
Color	Infrared
Modulation	Clocked
Fork opening	30 mm
Sensitivity adjustment	no setting elements
Switching frequency	50 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 4-pin

**205629****OGU 30/31-0 P2K-IBS****Fork light barrier****Technical data (typ.)**

Connection cable

+20°C, 24 V DC

VK ...

More information / accessories<https://www.di-soric.com/205629>