




206309
BE 1-A130/120-G0-K-BS
Barlight

- Very compact design
- Homogeneous luminous field
- Cable outlet usable at the front or back side
- Universal mounting options
- Metal casing
- Homogeneous illumination
- High efficiency
- Robust metal housing

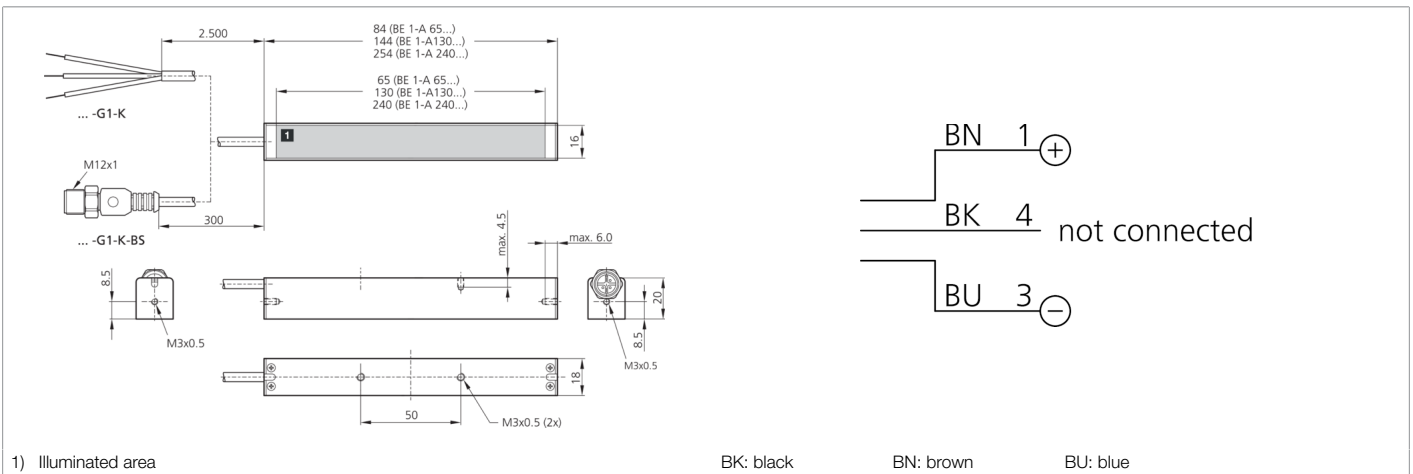

| Function | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | |

| Technical data (typ.) | +20°C, 24 V DC |
|--------------------------------------|---|
| Service voltage | 24 V DC (Supply Class 2) |
| Internal power consumption | 170 mA (24 V DC) |
| Power | 4.0 W (24 V DC) |
| Illuminated area | 130 x 16 mm |
| Housing dimensions | 16 x 20 x 144 mm |
| Housing material | Aluminum (Anodized) |
| Material | Polyurethane (Cable) |
| Protection class | III, operation on protective low voltage |
| Risk group (DIN EN 62471) | Free group |
| Approvals | UL |
| Design | Barlight |
| Light source | LED |
| Color | Infrared |
| Wavelength | 850 nm |
| Deflection angle FWHM | 120° |
| Light intensity | <ul style="list-style-type: none"> ■ 2100 μW/cm² (100.0 mm) ■ 600 μW/cm² (200.0 mm) ■ 120 μW/cm² (500.0 mm) |
| Control | without power control |
| Display | No |
| Ambient temperature during operation | 0 ... +40 °C (Continuous operation) |
| Protection type | IP 20 |
| Connection | Pigtail, 0.3 m, M12 |



206309

BE 1-A130/120-G0-K-BS

Barlight

Technical data (typ.)

+20°C, 24 V DC

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/206309>