




206455
FS 12-100-2 M G8-B8-PB
Color sensor

- Up to 100 color channels
- Integrated long-term stability
- Distinction of smallest shade nuances
- Very short response time
- Adjustable color tolerance
- Parameterization by keys and software
- Key lock function
- High ambient light compensation
- Exportable measured values for evaluations (.csv)
- For Profibus interface connection

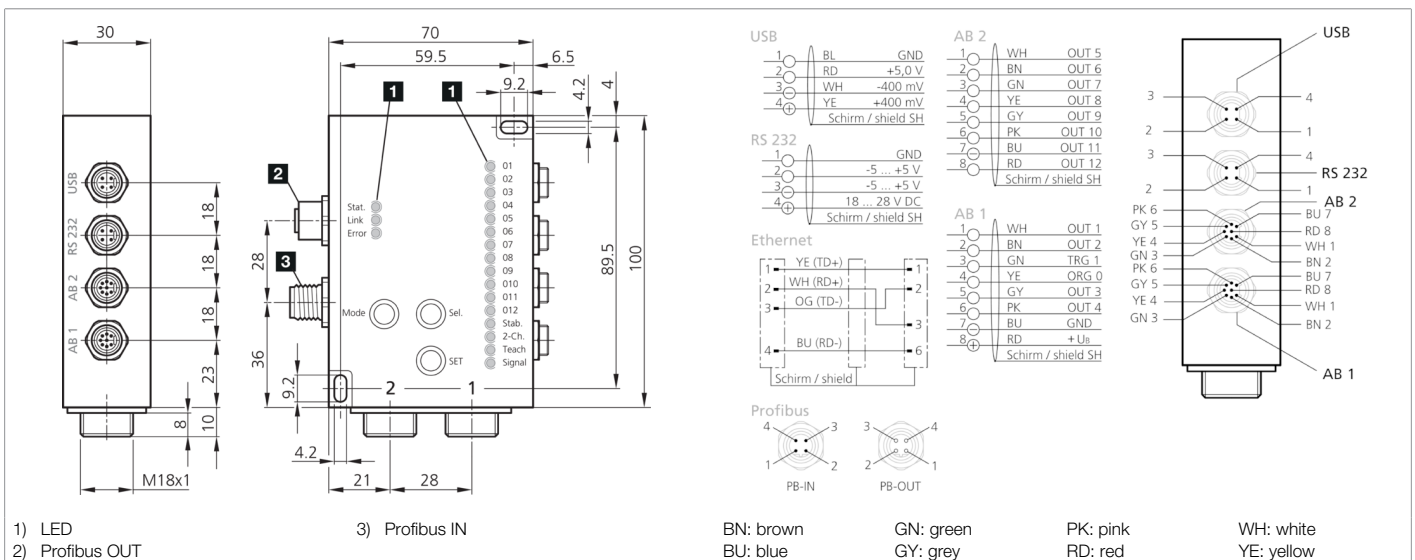

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 ... 28 V DC
No-load current (max.)	500 mA
Housing dimensions	70 x 100 x 30 mm
Housing length	70 mm
Housing height	100 mm
Housing width	30 mm
Fiber-optic cable connection / fixed optics	M18 x 1
Housing material	Aluminum (Anodized)
Protection class	III, operation on protective low voltage
Operating mode	<ul style="list-style-type: none"> ■ Continuous ■ Externally triggered color sequence detection ■ External teaching ■ Self-luminous objects ■ Body colors ■ Each color can be assigned to any output
Color memory internal	100
Number of measuring channels	1
Color channels of sensor	<ul style="list-style-type: none"> ■ 12 (Teachable via keys) ■ 15 (Binary coding) ■ 350 (Evaluation using software, with binary coding)



206455

FS 12-100-2 M G8-B8-PB

Color sensor

Technical data (typ.)	+20°C, 24 V DC
Color space mode	<ul style="list-style-type: none"> ■ XYZ / xyY / u'v'L* / L*a*b* / xyl (Body colors) ■ XYZ / xyY / u'v'L / xyl (Self-luminous objects)
Detection modes	<ul style="list-style-type: none"> ■ Minimum spacing (Assignment of the measured color to the stored color with the smallest color difference) ■ Check sphere (Check whether the measured color is within a specified tolerance) ■ Check cylinder (Check whether the measured color is within a specified tolerance)
Trigger input	TRG 0
Teach input	TRG 1
Voltage drop (max.)	2 V
Interface	<ul style="list-style-type: none"> ■ Profibus ■ RS232 ■ USB
Pulse stretching	0 ... 65535 ms adjustable
Switching output coding	<ul style="list-style-type: none"> ■ pnp + npn (12x) ■ binary coded = 350 switching conditions (350x)
Light source	LED (can be switched off)
Color	White
Light spot size	Dependent on focus optics
Color resolution	DE Lab < 1
Ambient light compensation	can be switched off
Switching hysteresis (max.)	0 ... 255 %
Tolerance ranges	5 selectable by keys / using software
Operating elements	3
Display	LED (19x)
Response time / scanning frequency	<ul style="list-style-type: none"> ■ 0.2 ms (bei 5.000 Hz: bis zu 100 Farben auswertbar) ■ 0.1 ms (bei 10.000 Hz: bis zu 30 Farben auswertbar) ■ 0.05 ms (bei 20.000 Hz: 3 Farben auswählbar)
Ambient temperature during operation	-10 ... +55 °C
Protection type	IP 54
Connection	Connector, M9, 8-pin
More information / accessories	https://www.di-soric.com/206455