



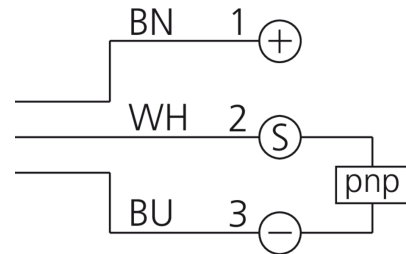

206603
DCC 08 M 1.5 POK-IBSL
Inductive proximity sensor

- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

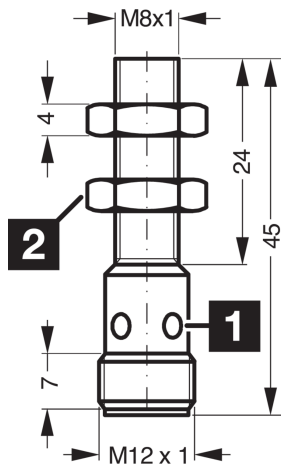

1) LED 4 x 90° (yellow) 2) Width over flats 13 mm BN: brown BU: blue WH: white

Function									

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	< 10 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	Flush
Thread	M8 x 1
Housing length	45 mm
Housing material	Stainless steel
Tightening torque (max.)	4 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Product series	INS Standard
Switching output	pnp, 200 mA, NC
Voltage drop (max.)	2 V (200 mA)
Switching distance (SN)	1.5 mm
Standardized measuring plate	8 x 8 x 1 mm
Switching hysteresis (max.)	5 %
Switching frequency	5000 Hz
Ambient temperature during operation	-25 ... +70 °C



206603

DCC 08 M 1.5 POK-IBSL

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Protection type

IP 67

Connection

Connector, M12, 4-pin

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/206603>