




**206742**  
**BEV-200/4-IBS**  
**Distributor box, switchable**

- 4-way distributor
- Sockets M12, individually switchable
- Trigger signal, looped

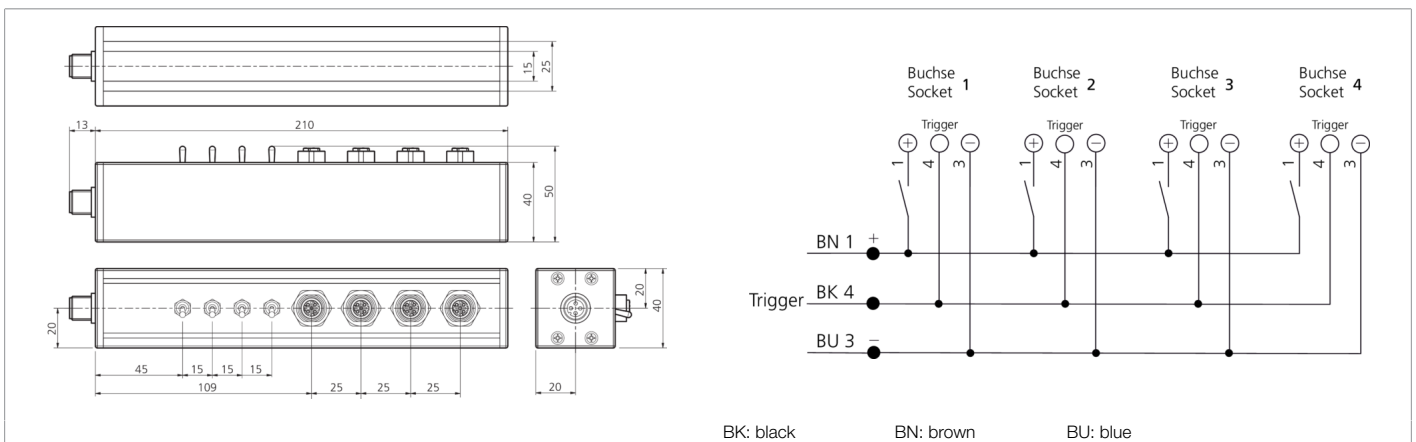

Function										

Technical data (typ.)	
Current-carrying capacity	4000 mA (total)
Service voltage	24 V DC
Housing material	Aluminum (Black, Anodized)
Component	Distributor box, switchable
To be used for	BE 1-Axxx-Frameset
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +60 °C
Protection type	IP 30
Connection	Connector, M12 x 1

More information / accessories
<a href="https://www.di-soric.com/206742">https://www.di-soric.com/206742</a>