




206797

WRBT 1000 K-M3-K

Plastic fiber optics

- Coaxial fiber configuration
- Highly precise detection
- Focusing optics VOM-M3 for smallest light spot
- cannot be shortened

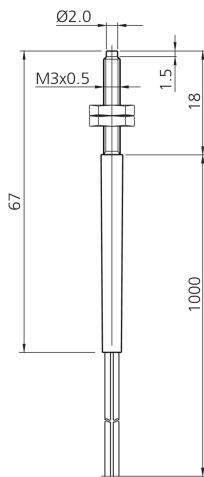

#### Technical data (typ.)

	+20°C
Light aperture	axial
Bending radius	> 15 mm
Material of fiber	PMMA
Material	<ul style="list-style-type: none"> <li>■ VA (Thread sleeve)</li> <li>■ PE (Coating)</li> </ul>
Operating principle	Diffuse sensor
Design	Thread
Single fiber-optics	Ø 2.2 mm
Single fiber	Ø 0.50 mm (151 x 0.075 mm)
To be used for	Device series OLV-K Amplifier
Opening angle	56°
Temperature resistance	-55 ... +70 °C

#### More information / accessories

<https://www.di-soric.com/206797>