


- Shielded
- Cable material made of PVC for applications in wet rooms or under water
- Sturdy metal union nut
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

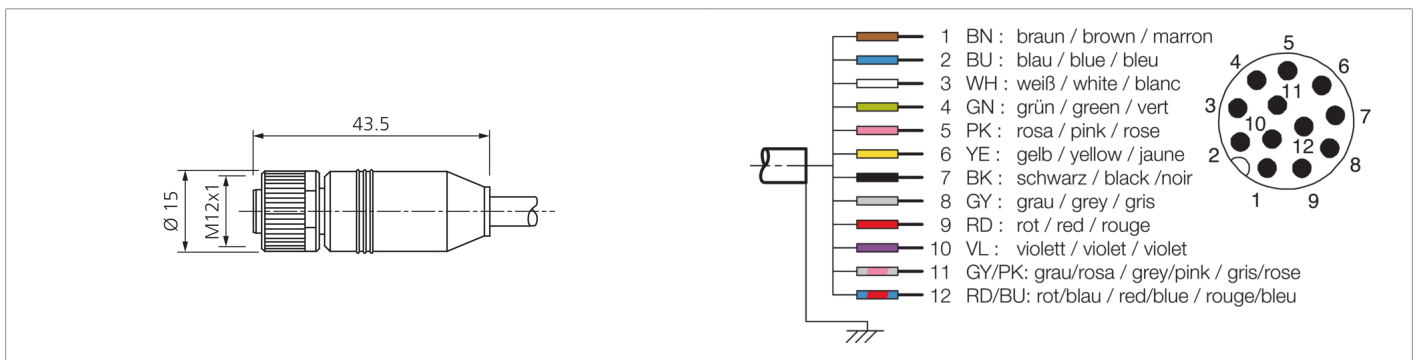

| Function | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|---|
| | | | | | | | | | |    |

| Technical data (typ.) | |
|--------------------------------------|--|
| Service voltage | 30 V AC/DC |
| Length | 5,000 mm |
| Diameter | Ø 6.5 mm (Diameter) |
| Thread | M12 |
| Material of cable | PVC |
| Component | Connection cable |
| Design | Straight / open cable end |
| Characteristics | Shielded, Metal nut |
| To be used for | CS 50 Vision Sensors, CS 60 Vision Sensors |
| LED Anzeige | No |
| Ambient temperature during operation | -25 ... +85 °C (Movable, Fixed) |
| Protection type | IP 65 / IP 66K / IP 67 |
| Connection | Socket, M12, 12-pin, A-coded |
| Cross-section | 0.14 mm ² (12 x) |

| More information / accessories | |
|--------------------------------|---|
| | https://www.di-soric.com/206897 |