




**207558**  
**KDCT 12 V 04 G3-B4**  
**Capacitive proximity switch**

- Auto-teach key / remote teach option / lock function
- Push-pull output pnp + npn
- Sensitivity adjustable, large operating distance
- Variable hysteresis
- Detection of liquids, powdery and solid materials
- Detecting metal and non-metal parts
- Detection possible even through containers and packaging
- Stainless steel housing

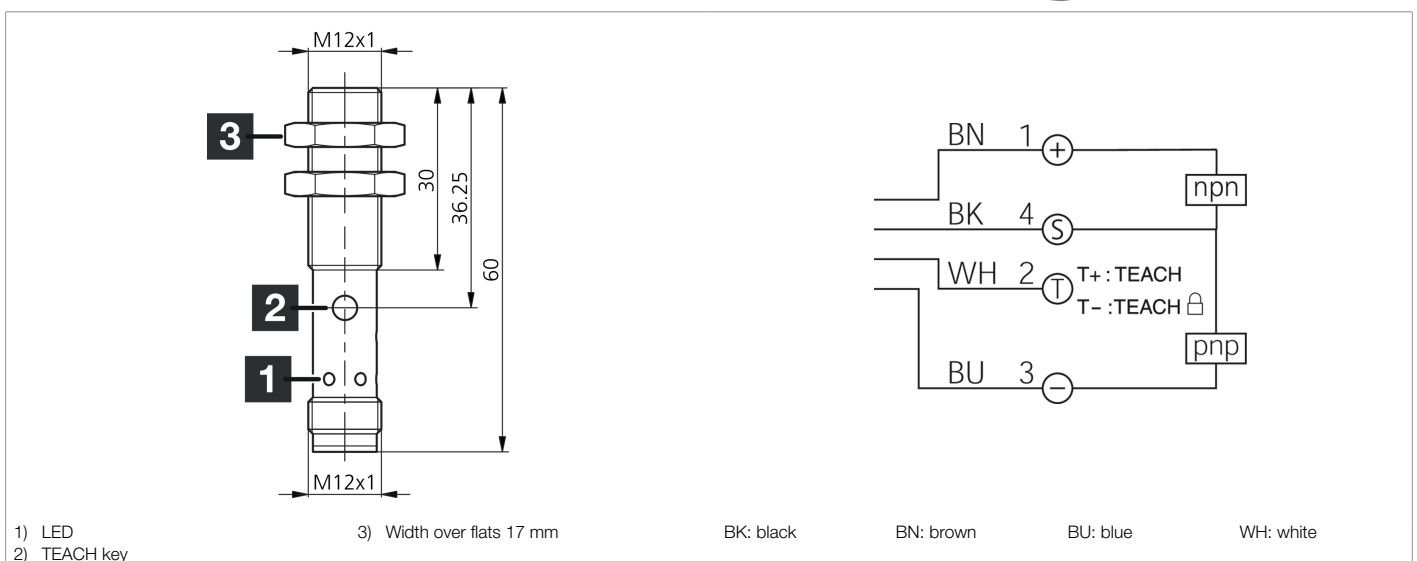

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 ... 30 V DC
No-load current (max.)	20 mA (24 V DC)
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M12 x 1
Housing length	60 mm
Housing material	Stainless steel (V2A 1.4301 / AISI 304)
Material	PBT (Sensor probe)
Protection class	III, operation on protective low voltage
Operating principle	Capacitive
Evaluation	digital
Design	Thread
Scope of delivery	2 x M12 nuts
Switching output	Push-pull, 150 mA, NO/NC, switchable
Voltage drop (max.)	2.4 V
Switching distance (SN)	4 mm (0.1 to 6 mm adjustable)
Standardized measuring plate	12 x 12 mm
Switching hysteresis (max.)	variable
Sensitivity adjustment	Teach button, Remote teach



207558

KDCT 12 V 04 G3-B4

Capacitive proximity switch

**Technical data (typ.)**

**+20°C, 24 V DC**

Display

LED yellow - Switching output

Switching frequency

50 Hz

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 65

Connection

Connector, M12, 4-pin

**More information / accessories**

<https://www.di-soric.com/207558>