




207787
FSB 50 M G3-B8
Color sensor

- Extensive range of fiber optic cables
- 4-channel, teach-in for many standard applications
- Very short response time
- Adjustable color tolerance
- Distinction of smallest shade nuances
- High ambient light compensation
- Integrated long-term stability
- Status display via LEDs
- Key lock function

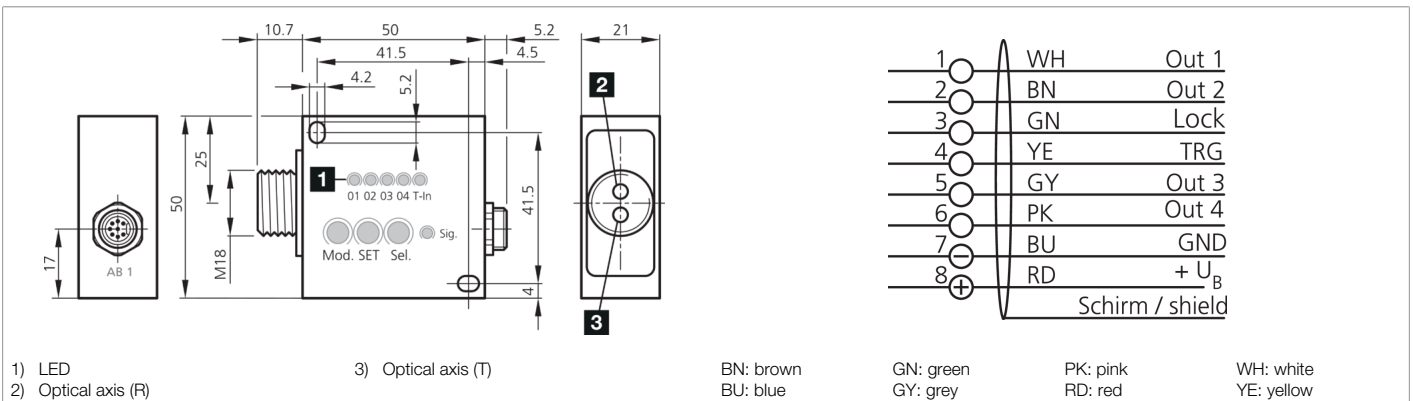

Function										

Technical data (typ.)		+20°C, 24 V DC
Service voltage		18 ... 28 V DC
No-load current (max.)		500 mA
Housing dimensions		50 x 50 x 21 mm
Housing length		21 mm
Housing height		50 mm
Housing width		50 mm
Fiber-optic cable connection / fixed optics		M18 x 1
Housing material		Aluminum (Anodized)
Protection class		III, operation on protective low voltage
Operating mode		<ul style="list-style-type: none"> ■ Continuous ■ External triggering
Color memory internal		4
Number of measuring channels		1
Color channels of sensor		4 (Teachable via keys)
Scanning block		Lock (+24 V DC)
Color space mode		L*a*b* (Body colors)
Detection modes		<ul style="list-style-type: none"> ■ Minimum spacing (Assignment of the measured color to the stored color with the smallest color difference) ■ Check sphere (Check whether the measured color is within a specified tolerance)
Trigger input		TRG (+24 V DC)
Switching output		pnp+npn (4x), < 100 mA
Voltage drop (max.)		2 V
Pulse stretching		0 ms / 50 ms (selectable)
Light source		LED



207787
FSB 50 M G3-B8
Color sensor

Technical data (typ.)	+20°C, 24 V DC
Color	White
Light spot size	Dependent on focus optics
Color resolution	DE Lab < 1
Ambient light compensation	dynamic
Range	Dependent on fiber-optic cable
Switching hysteresis (max.)	10 %
Tolerance ranges	5 selectable by keys
Operating elements	3
Display	LED (Channel state (4x), programming (5x))
Response time / scanning frequency	10 ms / 100 Hz or 1 ms / 1,000 Hz, parametrierbar
Ambient temperature during operation	-10 ... +55 °C
Protection type	IP 54
Connection	Connector, M9, 8-pin
More information / accessories	https://www.di-soric.com/207787