



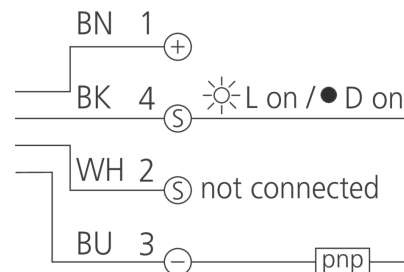

209227
OH 31 K 200 P3-T4
Diffuse sensor with background suppression

- Mechanical background suppression
- Compact design
- Red light
- Sensitivity is adjustable
- Switch for light/dark switching
- Standardized hole spacing 25.4 mm

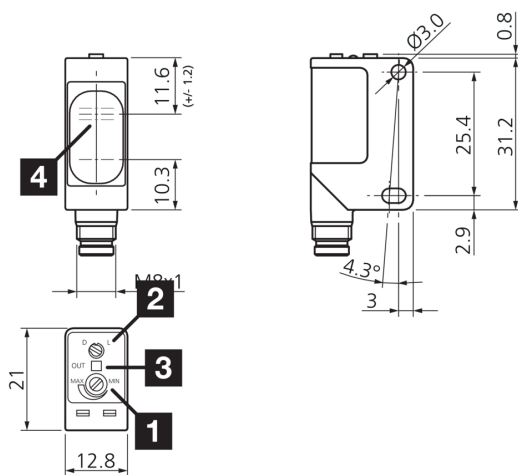

1) sensitivity
 2) NO/ NC

3) LED OUTPUT
 4) Optical axis

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 ... 30 V DC
No-load current (max.)	30 mA
Insulation voltage endurance	1000 V
Housing dimensions	31.2 x 21 x 12.8 mm
Housing length	21 mm
Housing height	31.2 mm
Housing width	12.8 mm
Housing material	Plastic (PA, 6.6)
Material	PMMA (Window)
Protection class	III, operation on protective low voltage
Operating principle	Diffuse sensor with background suppression
Evaluation	digital
Design	Cuboid design
Switching output	pnp, 100 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Light source	LED
Color	Red
Wavelength	630 nm
Modulation	Clocked


209227
OH 31 K 200 P3-T4
Diffuse sensor with background suppression

Technical data (typ.)		+20°C, 24 V DC
Background suppression		Yes
Ambient light immunity		3 kLx Halogen light, 10 kLx Sunlight
Switching distance		adjustable
Scanning range		30 ... 200 mm
Standardized measuring plate		200 x 200 mm (white)
Switching hysteresis (max.)		10 %
Sensitivity adjustment		Potentiometer
Switching frequency		1000 Hz
Response time		0.50 ms
Release time		0.50 ms
Ambient temperature during operation		-25 ... +70 °C
Temperature drift		0.2 mm/K
Protection type		IP 67
Connection		Connector, M8, 4-pin
Connection cable		TK ... /4
More information / accessories		https://www.di-soric.com/209227