




209742
BE-A30/30-G5-K-BS
Barlight

- High light intensity
- A minimal edge region
- Homogeneous luminous field
- Very compact design
- High protection type IP 67
- Robust design

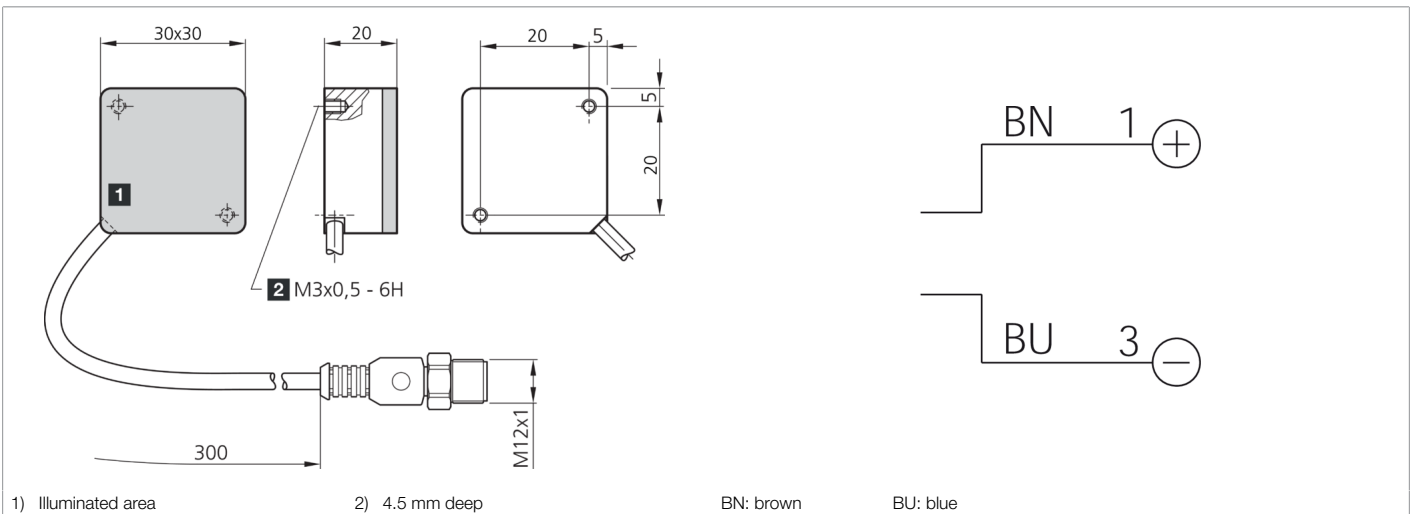

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (Supply Class 2)
Internal power consumption	46 mA (24 V DC)
Power	1.1 W (24 V DC)
Inverse polarity protection	no
Illuminated area	30 x 30 mm
Housing dimensions	30 x 30 x 20 mm
Housing material	Aluminum (Black, Anodized)
Material	PMMA, clear (Protection optics)
Weight	45 g
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Approvals	UL
Design	Barlight
Light source	LED
Color	White
Wavelength	5000 K
Deflection angle FWHM	130°
Light intensity	<ul style="list-style-type: none"> ■ 2.10 kLx (100.0 mm) ■ 6.00 kLx (200.0 mm) ■ 3.00 kLx (300.0 mm)
Control	without power control

**209742****BE-A30/30-G5-K-BS****Barlight**

Technical data (typ.)	+20°C, 24 V DC
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C (Continuous operation)
Protection type	IP 67
Connection	Pigtail, 0.3 m, M12, 3-pin
Connection cable	VK ...
More information / accessories	https://www.di-soric.com/209742