




**209773**  
**VKHM-Z-20/5**  
**Connection cable**

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

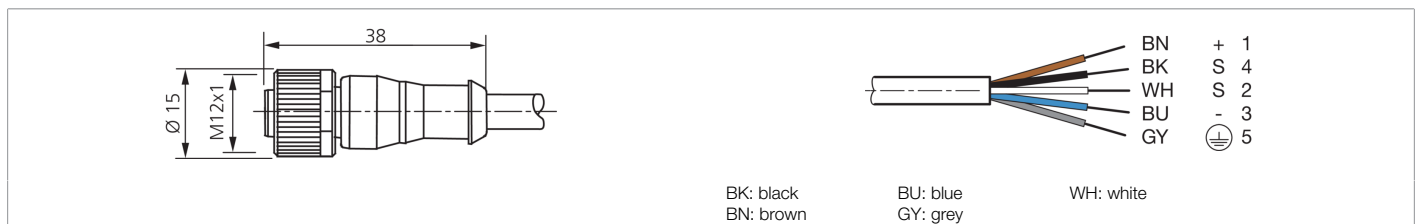

| Function |  |  |  |  |  |  |  |  |  |  |    |  |
|----------|--|--|--|--|--|--|--|--|--|--|----|--|
|          |  |  |  |  |  |  |  |  |  |  | CE |  |

| Technical data (typ.)                |  |
|--------------------------------------|--|
| Service voltage                      | < 125 V AC/DC                            |
| Length                               | 20,000 mm                                |
| Diameter                             | Ø 5.9 mm (Diameter)                      |
| Thread                               | M12                                      |
| Material of cable                    | Polyurethane                             |
| Drag chain properties                | 90 mm (Min. bending radius)              |
| Protection class                     | III, operation on protective low voltage |
| Design                               | Straight / open cable end                |
| Characteristics                      | Metal nut                                |
| Drag chain compatible                | Yes                                      |
| LED Anzeige                          | No                                       |
| Ambient temperature during operation | -5 ... +80 °C (Movable, Fixed)           |
| Protection type                      | IP 67                                    |
| Connection                           | Socket, M12, 5-pin, A-coded              |
| Cross-section                        | 0.34 mm <sup>2</sup> (5 x)               |

| More information / accessories | <a href="https://www.di-soric.com/209773">https://www.di-soric.com/209773</a> |
|--------------------------------|---|
|--------------------------------|---|