




**209773**  
**VKHM-Z-20/5**  
**Connection cable**

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

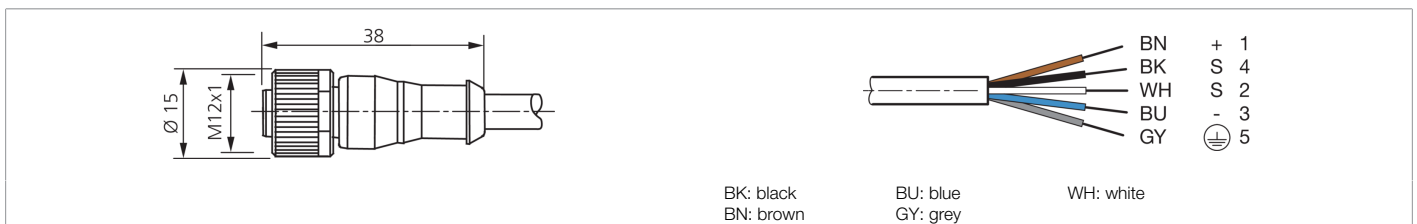

Function											
											 

Technical data (typ.)	
Service voltage	< 125 V AC/DC
Length	20,000 mm
Diameter	Ø 5.9 mm (Diameter)
Thread	M12
Material of cable	Polyurethane
Drag chain properties	90 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67
Connection	Socket, M12, 5-pin, A-coded
Cross-section	0.34 mm <sup>2</sup> (5 x)

More information / accessories	<a href="https://www.di-soric.com/209773">https://www.di-soric.com/209773</a>
--------------------------------	---