209942
KLT-M3-B40-T2-0.5
Plastic fiber optics

- Flexible sensor probe / R min. > 10 mm
- Accurate detection
- Cutting knife included

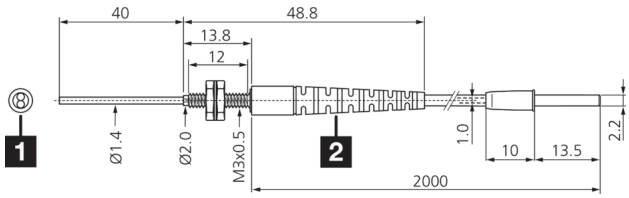

1) Fiber-optic core
2) Cable grommet

Function

Technical data (typ.)	+20°C
Length	2,000 mm (Can be shortened)
Thread	M3
Light aperture	axial, Flexible sensor probe
Bending radius	> 15 mm
Fiber	Parallel, Ø 0.5 mm (2x)
Bending radius of probe	> 10 mm
Material	■ Stainless steel (Sensor probe) ■ PE (Coating)
Operating principle	Diffuse sensor
Design	Thread
Characteristics	With cable protection bushing
To be used for	Device series OLV-K Amplifier
Range	75 mm
Resolution	Ø 0.1 mm
Temperature resistance	-55 … +70 °C

More information / accessories	https://www.di-soric.com/209942

© di-soric . Right to change reserved