




209943
KLT-M3-B40-T2-0.5K
Plastic fiber optics

- Flexible sensor probe / R min. > 10 mm
- Small parts detection
- Cutting knife included

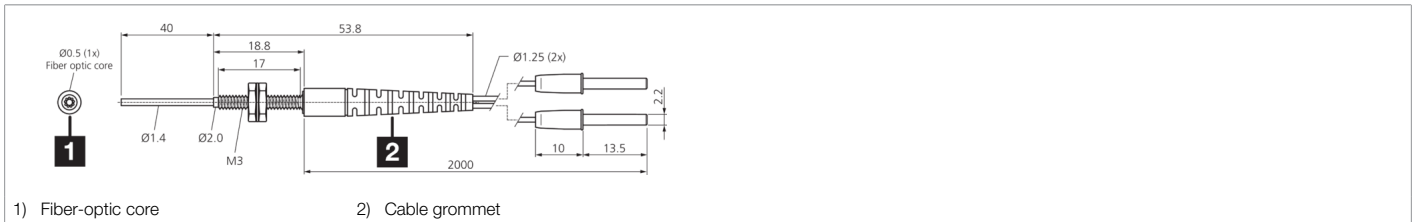

Function												

Technical data (typ.)	+20°C
Length	2,000 mm (Can be shortened)
Thread	M3
Light aperture	axial, Flexible sensor probe
Bending radius	> 15 mm
Fiber	Coaxial, Ø 0.25 mm (9x), Ø 0.5 mm (1x)
Bending radius of probe	> 10 mm
Material	<ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ PE (Coating)
Operating principle	Diffuse sensor
Design	Thread
Characteristics	With cable protection bushing
To be used for	Device series OLV-K Amplifier
Range	100 mm
Resolution	Ø 0.05 mm
Temperature resistance	-55 ... +70 °C

More information / accessories	https://www.di-soric.com/209943
--------------------------------	---