




209959
KLTM-Q10-T1-5
Plastic fiber optics

- Area detection without gaps
- Accurate detection

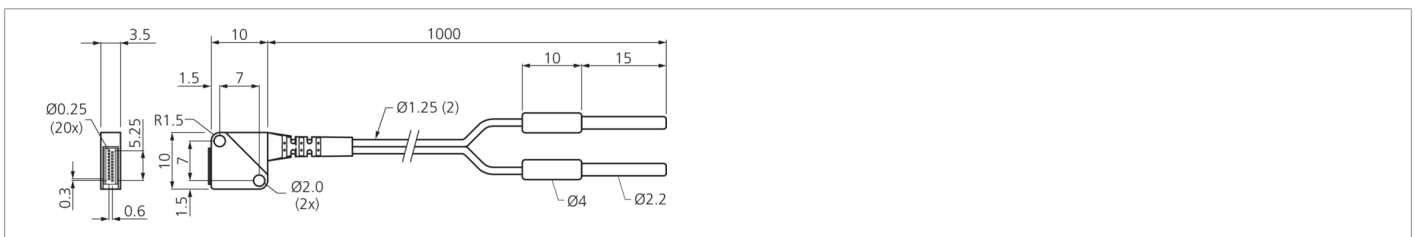

Function



Technical data (typ.)

+20°C

Length	1,000 mm (cannot be shortened)
Housing dimensions	10 x 10 x 3.5 mm
Light aperture	axial
Bending radius	> 25 mm
Fiber	Parallel, Ø 0.265 mm (16x)
Cross-section converter	4.24 mm
Material	<ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ PE (Coating)
Operating principle	Diffuse sensor
Design	Cuboid design
Characteristics	With cable protection bushing
To be used for	Device series OLV-K Amplifier
Range	100 mm
Resolution	Ø 0.1 mm
Temperature resistance	-55 ... +70 °C

More information / accessories

<https://www.di-soric.com/209959>