




209968
KLER-D3-30-S2-1
Plastic fiber optics

- Low installation depth
- 90° deflection
- Large range

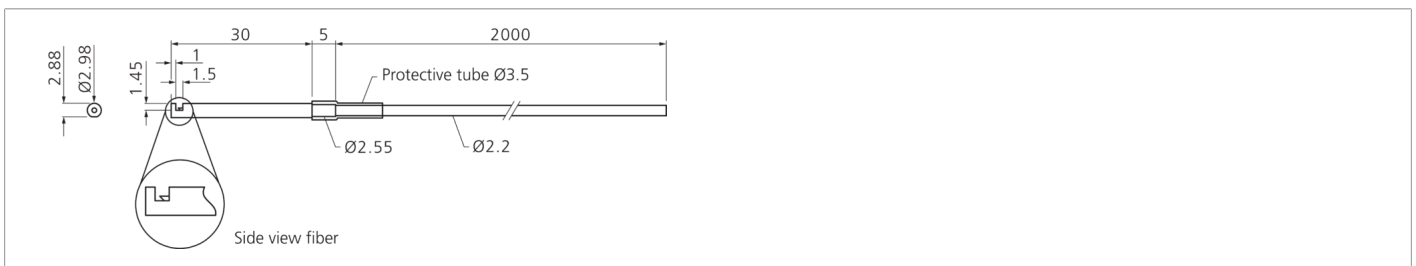

Function



Technical data (typ.)

+20°C

Length	2,000 mm (cannot be shortened)
Diameter	Ø 3.0 mm (Diameter)
Light aperture	radial
Bending radius	> 25 mm
Fiber	Ø 1.0 mm
Material	<ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ PE (Coating)
Operating principle	Through-beam sensor
Design	Cylinder
Characteristics	With S-bushing
To be used for	Device series OLV-K Amplifier
Range	600 mm
Resolution	Ø 0.2 mm
Temperature resistance	-25 ... +70 °C

More information / accessories

<https://www.di-soric.com/209968>