




210068
BE-DOME100/70-G1-T4
Dome light

- Extremely homogeneous, diffuse illumination
- Very compact design
- High light intensity
- Robust design

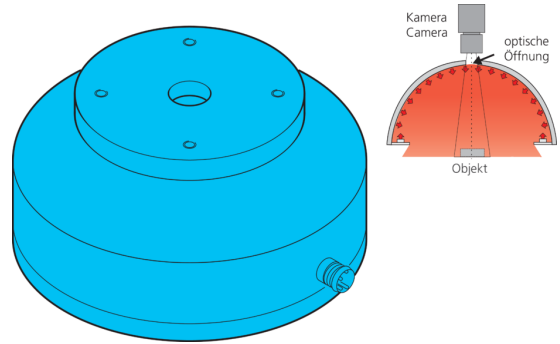

12
 aktive Fläche
 active area

70
 freier Innendurchmesser
 inner diameter / illuminated area

Ø 65

M3 x 5 (4x)

41

50

M4 / 5 tief / depth
 (4x)

optische Öffnung
 aperture

Stecker M8, 4-polig
 connector M8, 4-poled

50

Ø 100

Blick auf Anschlusseite
 View on connection position

PIN	Aderfarbe wire color	Funktion function
3	blau / blue	- blau / blue
1	braun / brown	+ 24V

BN: brown BU: blue

Function														
												CE	UK CA	

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC
Power	1.7 W (70 mA, 24 V DC)
Power consumption	70 mA
Illuminated area	Ø 70 mm
Quantity	32 (LEDs)
Diameter	Ø 100 mm (Diameter)
Housing material	Aluminum / Plastic
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Light source	LED
Color	red
Wavelength	617 nm
Deflection angle FWHM	120°
Ambient temperature during operation	0 ... +50 °C
Connection	Connector, M8, 4-pin

More information / accessories <https://www.di-soric.com/210068>