





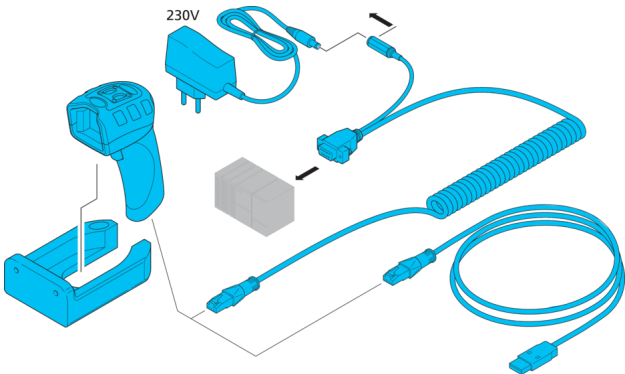

210543
ID-100-IM3-2-US
ID Handheld reader

- Dual zone optic: fast and reliable decoding despite fluctuating working distances
- Able to read every kind of 1D and 2D codes – coloured and low-contrast as well as damaged ones
- Fatigue-free work due to low weight
- Read feedback by means of LED, audible sound, and vibration

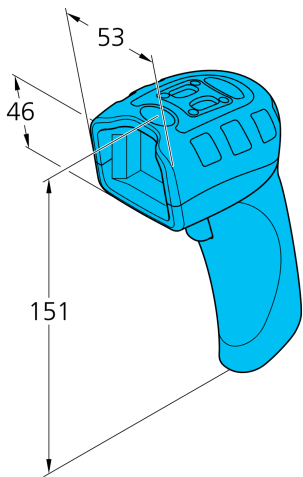

Function														 	

Technical data (typ.)		+20°C, 5 V DC
Service voltage		5 V DC
No-load current (max.)		250 mA
Housing dimensions		151 x 46 x 53 mm
Housing height		151 mm
Housing width		53 mm
Housing material		Plastic
Weight		130 g
Note		Additional components are required for operation
Code type - 1D-Codes (barcodes)		BC 412, Code 11, Codabar, Code 128, Code 39, Code 32, Pharmacode, GS1 DataBar (RSS), Hong Kong 2 of 5, IATA 2 of 5, Interleaved 2 of 5, Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Plessey, Straight 2 of 5, Telepen, Trioptic, UPC / EAN / JAN, UPC / EAN
Code type - 2D-Codes		Aztec Code, QR, Micro QR Code, Data Matrix (ECC 0-200), Codablock F, Han Xin, Maxi Code
Code type - Stacked codes		PDF 417, Micro PDF 417, Code 49, Codablock, GS1 Composite (CC-A/CC-B/CC-C), GS1 DataBar (Composite & Stacked)
Interface		■ RS232 (In operation with ID-K-SD/DCJ-RJ50-2) ■ USB (Type A operation with ID-K-RJ50/U-2)
Image sensor		CMOS
Resolution		1280 x 960 Pixel
Position scanner to code		Tilt 180°, Pitch ± 65°, Skew ± 60°
Ambient temperature during operation		-20 ... +55 °C
Protection type		IP 54



210543
ID-100-IM3-2-US
ID Handheld reader

Technical data (typ.)	+20°C, 5 V DC
Connection	RJ 45, RJ 50
More information / accessories	https://www.di-soric.com/210543