


- Highest resolution
- Compact design
- Lock screws for focus and iris adjustment

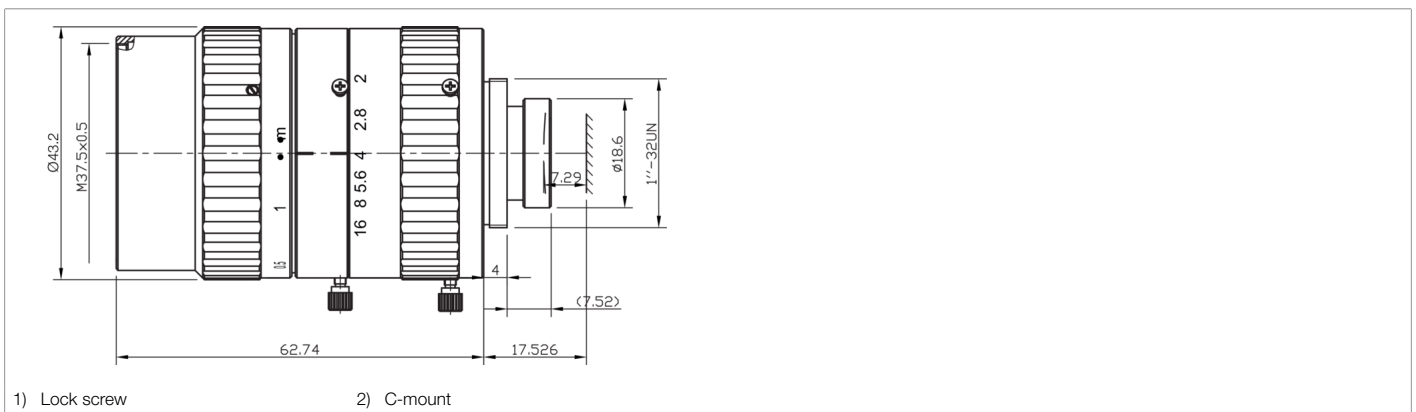

| Technical data (typ.) | | +20°C | |
|--------------------------------|--|---|--|
| Lens connection | | C-mount | |
| Filter thread | | M37.5 x 0.5 | |
| To be used for | | Vision Systems and ID Systems | |
| Focal length | | 50 mm | |
| Aperture ratio | | 1:1.8 | |
| Aperture (F) | | 2.0 | |
| Distortion | | 0.1 % | |
| Sensor size | | max. 1/1.2" | |
| Resolution | | 6 Megapixel | |
| Working distance | | 200.0 ... 400 mm | |
| Minimum Object Distance MOD | | 200 mm | |
| More information / accessories | | https://www.di-soric.com/210557 | |