
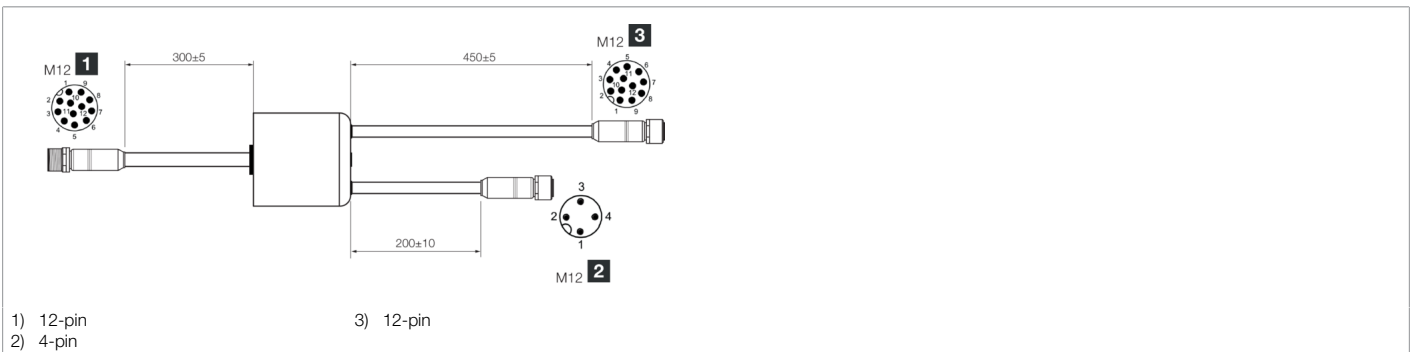



210606
CS-Y-0.3/12-A
Y-distributor cable

- Metal connector
- Durable PU coating
- Flexible lead design
- High protection type IP 67

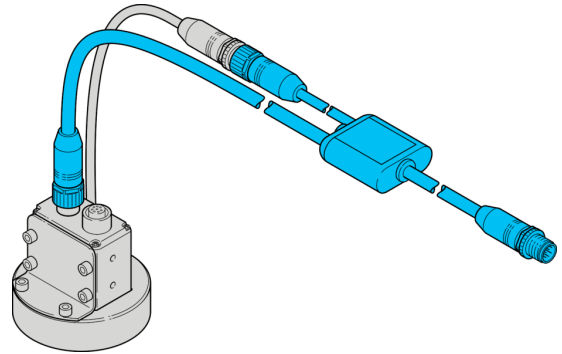

| Function | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|---|
| | | | | | | | | | | |   |

| Technical data (typ.) | +20°C, 24 V DC |
|--------------------------------------|--|
| Service voltage | < 30 V DC |
| Operating current | < 1.5 A DC |
| Housing material | Plastic |
| Material | Polyurethane (Cable) |
| Component | Y-distributor cable |
| Design | straight |
| To be used for | Connection of a BEK-R33-... to CS 50 |
| Note | IN & OUT kept on PNP (CS50) |
| External illumination trigger (pnp) | either OUT 3 (CS 50 ...) or PIN 6 (connector M 12) |
| Ambient temperature during operation | -20 ... +85 °C |
| Protection type | IP 67 |
| Connection | Connector, M12, 12-pin |
| Connection 2 | Socket, M12, 4-pin |
| Connection 3 | Socket, M12, 12-pin |

| More information / accessories | https://www.di-soric.com/210606 |
|--------------------------------|---|
|--------------------------------|---|