




210939
DCC 18 VH 05 NSK/230/V/IP67
Inductive proximity sensor

- High-temperature resistant up to 230 °C permanent temperature
- Stainless steel housing
- Sensing surface LCP
- Cable material PTFE
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression

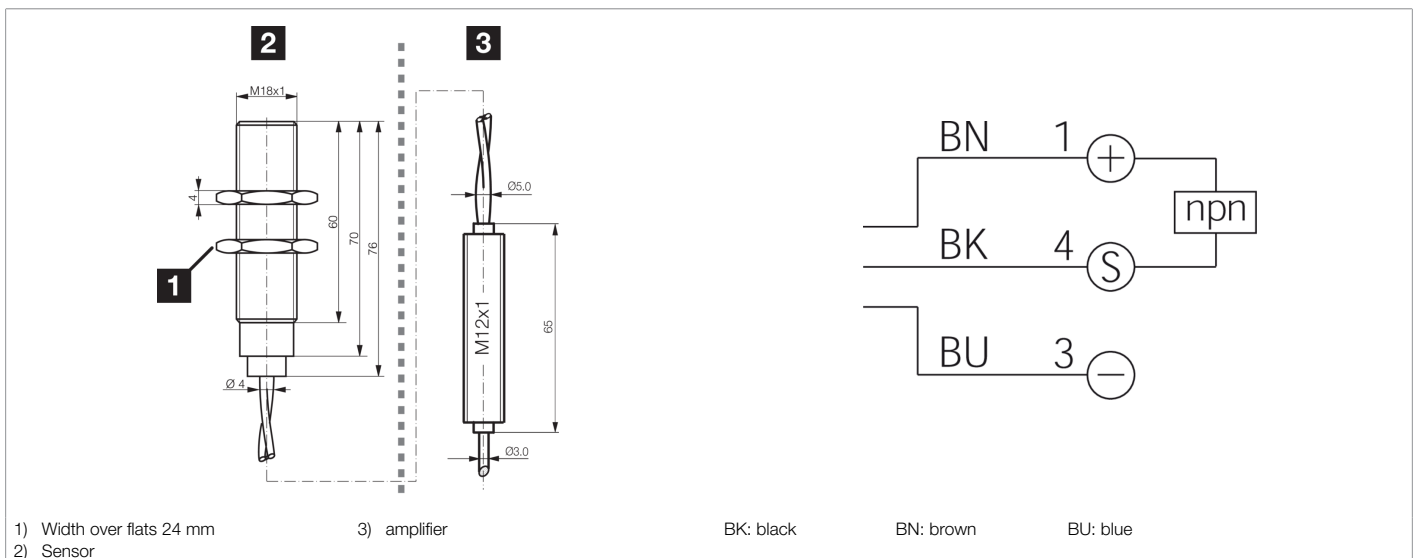

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M18 x 1
Housing length	76 mm
Housing material	Stainless steel (LCP)
Tightening torque (max.)	50 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	< +230 °C, high-temperature resistant
Product series	INH High-temperature resistant
Switching output	npn, NO
Voltage drop (max.)	2 V
Switching distance (SN)	5 mm
Standardized measuring plate	18 x 18 x 1 mm
Ambient temperature during operation	0 ... +230 °C
Protection type	IP 67



210939
DCC 18 VH 05 NSK/230/V/IP67
Inductive proximity sensor

Technical data (typ.)	+20°C, 24 V DC
Connection	Cable, 2.0 m (flying leads)
More information / accessories	https://www.di-soric.com/210939