


CS 60 Vision Sensor

-

[illegible]

(2)

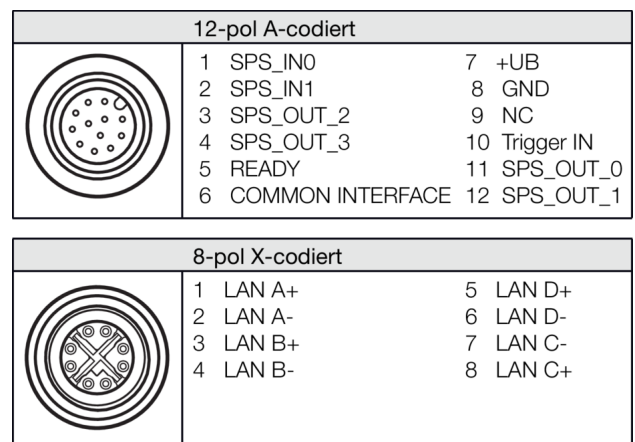

212910
CS60-BM28-EP15/300
CS 60 Vision Sensor

Technical data (typ.)		+20°C, 24 V DC
Interface		■ Ethernet ■ Digital Input/Output
Protocols		TCP/IP, FTP/SFTP, Profinet, EtherNet/IP
Color		Red / white switchable (internal)
Focal length		8 mm (exchangeable S-mount lens)
Optical format		1/4"
Resolution		736 x 480 Pixel
Pixel size		4.5 x 4.5 µm
Working distance		50.0 ... 2000 mm
Display		LED Green - Operation, yellow - DATA-Link yellow - Trigger
FPS - Frames Per Second (max.)		30 images/second
Flash length		< 2 ms
Ambient temperature during operation		0 ... +50 °C
Vibration/shock resistance		10 to 55 Hz / 1.0 mm / 30 g / 11 ms
Protection type		IP 67
Connection		Connector, M12, 12-pin (A-coded)
Connection 2		Socket, M12, 8-pin
Cable		Connection cables max. 25 m
More information / accessories		https://www.di-soric.com/212910