


Spotlight

-
- BEK-P14-G1T-IBS
18...30 V DC 200 mA
Made in Germany www.di-soric.com
- di-soric
- Einstrahlung vermeiden
Vermeidung Folienbrüche 2
- IP67
50°C
10-15
- CE

[illegible]

© di-soric . Right to change reserved . 17.05.2024 . Page 1

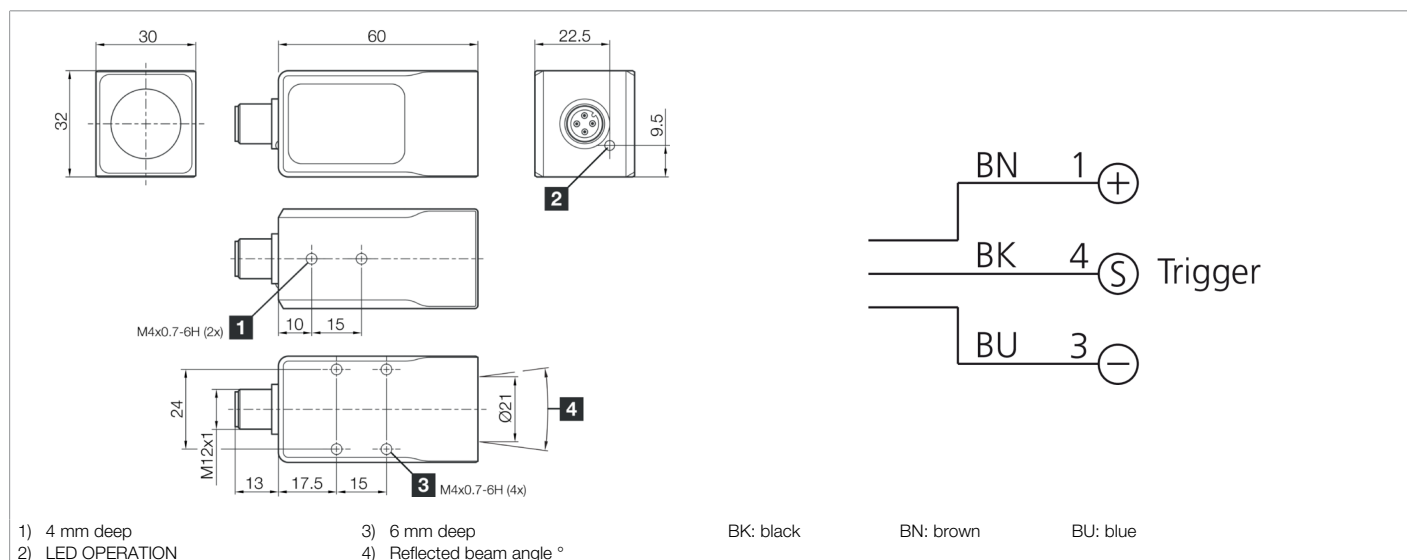

212926
BEK-P14-G1T-IBS
Spotlight

Technical data (typ.)		+20°C	
Light intensity		■ 64.0 kLx (100.0 mm) ■ 23.0 kLx (200.0 mm) ■ 4.50 kLx (500.0 mm)	
Control		Integrated power control	
Display		LED Green - Operating display	
Shock/vibration load		30 g, 11 ms / 10 ... 55 Hz, 1.0 mm	
Ambient temperature during operation		0 ... +40 °C	
Protection type		IP 67	
Connection		Connector, M12, 3-pin	
Connection cable		VK ...	
More information / accessories		https://www.di-soric.com/212926	